


peakmarks® Performance Report

Exadata X7-2 Elastic Configuration

Version 10.2
June 2024

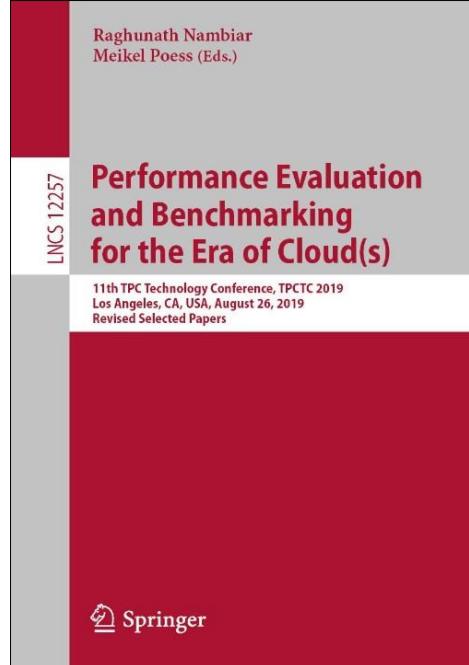

peakmarks® presented its software at the
11th Technology Conference of the Transaction
Processing Performance Council (TPC)
2019 in Los Angeles.



peakmarks® Software and its documentation are protected under intellectual property laws. Reengineering, disassembling, or decompiling of the software is strictly prohibited. The license agreement states that explicit permission is mandatory for any use, display, modification, distribution, transmission, licensing, transfer, publication, or demonstration of the peakmarks® Software and its documentation.

peakmarks® is a registered trademark. Other names may be trademarks of their respective owners.



All performance data in this presentation were determined with the peakmarks® Software under certain conditions and do not necessarily correspond to the manufacturer's specifications. All information in this presentation is current as of June 2024.

Abbreviations and Metrics



[MBps]	megabyte per second	[IOPS]	I/O operations per second
[GBps]	gigabyte per second	[qps]	queries per second
[dbps]	database blocks per second	[rps]	rows per second
[rbps]	redo blocks per second	[tps]	transactions per second
[dbpt]	database blocks per transaction	[eps]	executions (SQL) per second
[kBpt]	kilobyte per transaction	[Mops]	million operations per second
[s]	seconds	Nodes	number of cluster nodes
[ms]	milliseconds	Jobs	number of workload processes
[μs]	microseconds	BuCache	Database Buffer Cache
		FlCache	Database or Exadata Flash Cache



- 1 Introduction to peakmarks® Software
- 2 Platform Description Reference System
- 3 Server System Performance
- 4 Storage System Performance
- 5 Log Writer Background Processes Performance
- 6 Database Writer Background Processes Performance
- 7 Data Load Performance
- 8 Data Analytics Performance
- 9 Online Transaction Processing Performance
- 10 PL/SQL Application Programs Performance



peakmarks

Performance is not everything.
But without performance, everything is worth nothing.



Introduction to peakmarks® Software

Transparency on Performance




Simple and understandable Performance Metrics

No clear and transparent performance metrics are currently available for Oracle database platforms, whether hosted on cloud services or installed on-premises.

However, Peakmarks has taken inspiration from the automotive industry, which uses easily understandable and comparable performance indicators.

Access to performance metrics is crucial for better understanding Oracle database infrastructure performance. These metrics allow for cross-vendor comparability and support the evaluation, quality assurance, and capacity planning of Oracle database infrastructures, resulting in higher cost efficiency.

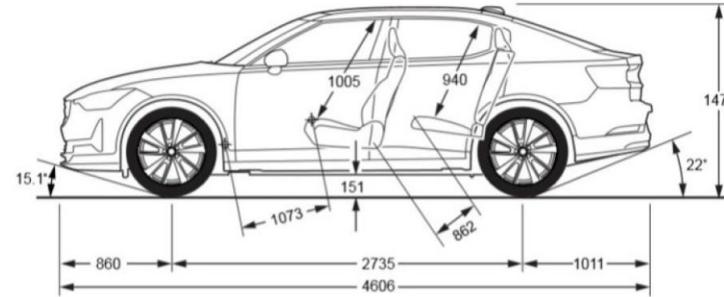

Long range Single motor	Long range Dual motor	Long range Dual motor with Performance pack
Driveline Rear-wheel drive	Driveline All-wheel drive	Driveline All-wheel drive
Power ¹ 220 kW / 299 hp	Power ¹ 310 kW / 421 hp	Power ¹ 335 kW / 455 hp
Torque ¹ 361 lb-ft	Torque ¹ 546 lb-ft	Torque ¹ 546 lb-ft
0-60 mph ¹ 5.9 seconds	0-60 mph ¹ 4.3 seconds	0-60 mph ¹ 4.1 seconds
Top speed ¹ 127 mph	Top speed ¹ 127 mph	Top speed ¹ 127 mph
Range up to ² 320 mi (EPA)	Range up to ² 276 mi (EPA)	Range up to ² 247 mi (EPA)*
Towing power Up to 2000 lbs	Towing power Up to 2000 lbs	Towing power Up to 2000 lbs
Battery 400 V Lithium-ion battery	Battery 400 V Lithium-ion battery	Battery 400 V Lithium-ion battery
82 kWh capacity, 27 modules	78 kWh capacity, 27 modules	78 kWh capacity, 27 modules

Source: www.polestar.com




Simple and understandable Performance Metrics

Scope	Key Performance Metric	Measurement Unit	Workloads
Server Performance	<ul style="list-style-type: none"> ▪ Query throughput ▪ Query response time ▪ Buffer cache scan rate 	<p>[qps] [ms] [MBps]</p>	Look-up queries, more complex queries, reports, scans, mixed queries and scan
Storage Performance	<ul style="list-style-type: none"> ▪ SQL sequential read throughput ▪ SQL random I/O throughput ▪ SQL random I/O service time 	<p>[MBps] [iops] [μs]</p>	Conventional storage, intelligent storage with offload technology
LGWR Performance	<ul style="list-style-type: none"> ▪ Log writer throughput ▪ Log writer latency 	<p>[tps], [MBps] [ms]</p>	Transactions with different REDO sizes
DBWR Performance	<ul style="list-style-type: none"> ▪ Database writer throughput 	[dbps]	
Data Load Performance	<ul style="list-style-type: none"> ▪ Data load rate 	[TBph]	Buffered data load (transactional systems), direct data load (data warehouse and analytic systems), streamed data load (IOT applications)
Data Analytics Performance	<ul style="list-style-type: none"> ▪ Data scan rate 	[MBps]	Conventional storage, intelligent storage with offload technology, row store, column store
Online Transaction Processing Performance	<ul style="list-style-type: none"> ▪ Transaction throughput ▪ Transaction response time 	<p>[tps] [ms]</p>	Transactions of different complexity; read-intensive transaction mix with data load, write-intensive transaction mix with heavy updates and data load
Processor Performance	<ul style="list-style-type: none"> ▪ PL/SQL operation throughput ▪ PL/SQL algorithm processing time 	<p>[Mops] [s]</p>	Arithmetic operations on different numeric data types, mixed built-in operations on different data types, recursive Fibonacci number algorithm, prime number algorithm



More than 30 workloads in 8 core disciplines

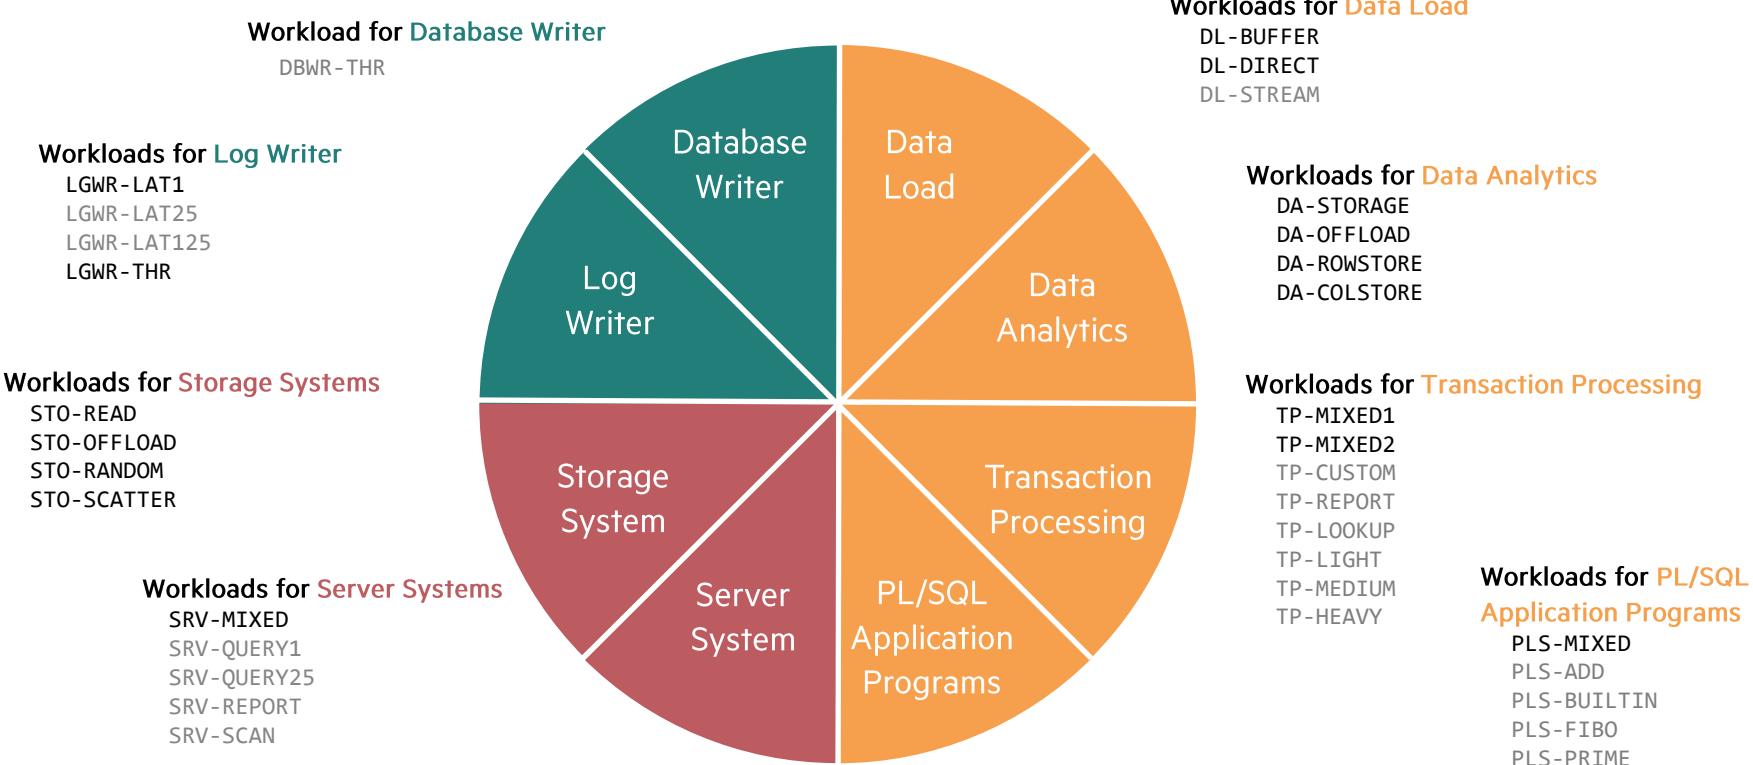



peakmarks® Executive Summary - Simple and understandable Performance Metrics – within 48 hours

peakmarks® Executive Summary

June 2024

The peakmarks® Software is a powerful tool that quickly and accurately identifies key performance metrics serve as a solid foundation for

- Evaluations: Performance metrics evaluate the price/performance of various database components.
- Capacity planning: Identify the optimal infrastructure components for your workload.
- License cost optimization: Identify the optimal infrastructure components for your workload.
- Quality assurance: Database service is regularly audited for its performance stability and compliance.

peakmarks® Software is a comprehensive tool that covers over 30 workloads. peakmarks® source tools. A detailed analysis of each workload is presented in a PowerPoint presentation. The most important key performance metrics for the decision-maker's convenience.

Database Service – peakmarks Reference System

Platform	Exadata Database Server	Exadata Storage Server
Oracle Exadata X7-2 Elastic Configuration	2 x Exadata X7 Database Server, each with 1 Intel Xeon 8160, 2.1 - 3.7 GHz, 2 sockets, 48 cores, 96 threads, 786 Gbyte DDR4 2.6 GHz, PCI Gen 3	3 x Exadata X8 Storage servers

Copyright © 2024 peakmarks.com

peakmarks® Key Performance Metrics for platform components in database operations

Category	Key Performance Metric
Server System	Throughput of mixed queries and scans Throughput logical reads Buffer cache scans
Storage System	SQL sequential I/O throughput SQL sequential I/O throughput - using smart scan SQL random read throughput - 100% read SQL random read throughput - 80% read SQL random write throughput

peakmarks® Key Performance Metrics for critical database operations

Category	Key Performance Metric
Log Writer (LGWR)	Commit throughput and latency for small transactions Log writer throughput
Database Writer (DBWR)	Database writer throughput

Abbreviations and metrics:

- [qps] queries per second
- [tpm] transactions per second
- [dbps] database blocks per second
- [Mops] million operations per second
- [Mbps] megabyte per second
- [IOPS] I/O operations per second

Copyright © 2024 peakmarks.com

peakmarks® Key Performance Metrics for representative database operations

Category	Key Performance Metric	Throughput	Throughput	peakmarks® Workload
Data Load	Throughput transactional data load - using the buffer cache, 5 rpf	136 MBps	476,194 rps	DL-BUFFER
	Throughput data warehouse data load - bypassing the buffer cache	2,295 MBps	8,020,544 rps	DL-DIRECT
Category	Key Performance Metric	Throughput	Throughput	peakmarks® Workload
Data Analytics	Throughput data scan - using the storage system Throughput data scan - using smart scan Throughput data scan - using row store Throughput data scan - using column store	12,516 MBps 68,525 MBps 255,266 MBps 39,916,054 MBps	36,765,045 rps 201,142,122 rps 845,57,690 rps 131,717,699,993 rps	DA-STORAGE DA-OFFLOAD DA-ROWSTORE DA-COLSTORE
Category	Key Performance Metric	Throughput	Response time	peakmarks® Workload
Transaction Processing	Read-intensive OLTP transactions - throughput and response time Write-intensive OLTP transactions - throughput and response time	2,317,660 tps 51,392 tps	0.094 ms 2,478 ms	TP-MIXED1 TP-MIXED2

peakmarks® Key Performance Metrics for PL/SQL application programs

Category	Key Performance Metric	Throughput	Elapsed time	peakmarks® Workload
PL/SQL Application Programs	Throughput of mixed PL/SQL operations Execution time prime number (n = 8000); data type NUMBER	6,937 Mops -	- 80 s	PLS-MIXED PLS-PRIME

Abbreviations and metrics:

- [qps] queries per second
- [tpm] transactions per second
- [dbps] database blocks per second
- [Mops] million operations per second
- [Mbps] megabyte per second
- [IOPS] I/O operations per second
- [ms] milliseconds
- [s] seconds
- [rpf] rows per transaction

Copyright © 2024 peakmarks.com



peakmarks

Simple. Representative. Fast.

Platform description Reference System

Platform Description



Server

	Oracle Exadata X7-2 Single Instance	Oracle Exadata X7-2 2-Node RAC Cluster
Launch date	2017	2017
Processor	Intel Xeon 8160, 2.1 – 3.7 GHz	Intel Xeon 8160, 2.1 – 3.7 GHz
#sockets, total	2	4
#cores, total	48	96
#threads, total	96	192
DRAM capacity, total	768 GByte, DDR4, 2.6 GHz	1,536 GByte, DDR4, 2.6 GHz
DRAM capacity per core	8 GByte	8 GByte
Operating System	Bare metal, OEL	Bare metal, OEL
Connectivity	InfiniBand 2 x 40 Gbps	InfiniBand 2 x 40 Gbps per server system

Platform Description



Storage

	Oracle Exadata X8-2 Scale-Out Storage Server High Capacity
Launch date	2018
#storage server, total	3
DRAM capacity, total	192 GByte
PMEM capacity, total	-
Flash capacity, total raw	76.8 TByte
Disk capacity, total raw	504 TByte
Connectivity, per storage system	InfiniBand 2 x 40 Gbps per storage system
File system	ASM high redundancy ASM allocation unit 4 MByte
Compression	No
Deduplication	No

Platform Description



Database

	Oracle 19.20 Enterprise Edition
Database block size	8 kByte
Log Modus	NOARCHIVELOG
DataGuard	No
REDO Log Files, per instance	4 x 4 GByte without multiplexing
SGA size, per instance	384 GByte

peakmarks® Software

	Single Instance	2-Node RAC Cluster
Version	10.2	10.2
Build	231115	231115
Database size	8 TByte	2 x 4 TByte

Notes:


- To ensure full transparency, the peakmarks® Software generates individual Oracle AWR reports for each single performance test. In Oracle AWR reports, the idle wait event "enq: UL - contention" indicates process synchronization by the peakmarks® master process and does not cause wait states of workload execution processes.
- peakmarks® shows slightly better performance results than AWR because peakmarks® is the inner snapshot around tests while AWR is the outer snapshot for performance statistics.



peakmarks

Stop guessing. Start measuring.

Workloads to determine the Server Performance in Database Operations





Motivation

The server's performance significantly impacts the performance of all database operations and the license and maintenance costs.

The goal is to

- Validate the performance capabilities (speed, throughput, scalability) of server components in database operation: processors, main memory, and internal memory channels
- Determine the impact of server virtualization, multithreading, NUMA effects, and encryption on server performance
- Optimize database license and maintenance costs for server system (per-core performance matters)

Notes

- Some cloud service providers do not publish their server components and configurations, and these are subject to change without prior notice.
- Customers need to know the per-thread performance, which significantly impacts application process performance.
- Customers need to know the per-core performance, which significantly impacts Oracle license costs. In some cases, Oracle licensing costs exceed infrastructure costs.



Key Performance Metrics

- **SQL query throughput** in queries per second [qps]
- **SQL query response time** in milliseconds [ms]
- **Logical reads** in database blocks per second [dbps]
- **SQL buffer cache scan rate** in megabytes per second [MBps]



Description

Workload	Measurement Unit	Action
SRV-QUERY1	[qps]	Latency-oriented look-up query – select 1 row via index, e.g., select customer, account, product, order, invoice.
	[ms]	This workload shows maximum query throughput and minimum response time for simple queries.
SRV-QUERY25	[qps]	Data volume-oriented look-up query – select Ø 25 rows via index, e.g., select last month's bank account bookings; select item list of order.
	[ms]	This workload shows maximum query throughput and minimum response time for more complex queries.
SRV-REPORT	[dbps]	Online Report – select Ø 125 rows via index, e.g., select last month's cell phone call records.
		This workload shows maximum logical read throughput.
SRV-SCAN	[MBps]	Full table scan . Search for data without index support.
		This workload shows a maximum database buffer cache scan rate.

Notes

- All accessed data is completely stored in the database buffer cache. There are no I/O operations, and all SRV workloads are CPU-bound.
- These queries occur in all applications in all industries and demonstrate performance in real-world operations.




Description

Workload	Measurement Unit	Action
SRV-MIXED	[qps]	Mixed queries and full table scans on cached data.
	[ms]	This complex workload comprises the equally weighted simple workloads SRV-QUERY1, SRV-QUERY25, SRV-REPORT, and SRV-SCAN. It's important to note that SPEC numbers may not always be available or provide an accurate representation of Oracle database operations. To determine server system performance in Oracle database operations, we rely on the SRV-MIXED peakmarks workload as it is the most representative. This workload is used to compare different CPU architectures, such as ARM, Intel Xeon, AMD EPYC, IBM POWER, and IBM Z.

Notes

- All accessed data is completely stored in the database buffer cache. There are no I/O operations, and all SRV workloads are CPU-bound.
- These queries occur in all applications in all industries and demonstrate performance in real-world operations.

Server System Performance



Server System Performance



Workload SRV-QUERY1 – Simple look-up query, highest throughput, lowest response time

Reference System
Single Instance

Run	Test	Workload	Nodes	CPU					Queries			Response			Log reads		BuCache		Elapsed
				busy	user	sys	idle		total	per cpu	[qps]	[ms]	time	total	per cpu	[dbps]	read	%	
2	7	SRV-QUERY1	1	1	2	1	0	98	111,223	111,223	0.009	445,066	445,066	99.94	181				
8	SRV-QUERY1	1	24	26	25	0	74	2,083,530	86,814	0.011	8,312,219	346,342	100.00	182					
9	SRV-QUERY1	1	48	51	50	1	49	3,267,839	68,080	0.015	12,991,193	270,650	100.00	181					
10	SRV-QUERY1	1	72	75	74	1	25	3,234,717	44,927	0.022	12,842,742	178,371	100.00	182					
11	SRV-QUERY1	1	96	98	97	1	2	3,346,258	34,857	0.029	13,272,540	138,256	100.00	182					

Reference System
2-node Cluster

Run	Test	Workload	Nodes	CPU					Queries			Response			Log reads		BuCache		Elapsed
				busy	user	sys	idle		total	per cpu	[qps]	[ms]	time	total	per cpu	[dbps]	read	%	
9	7	SRV-QUERY1	2	2	2	1	0	98	233,345	116,673	0.009	933,557	466,779	99.95	180				
8	SRV-QUERY1	2	48	25	25	0	75	4,178,134	87,044	0.011	16,669,620	347,284	100.00	182					
9	SRV-QUERY1	2	96	51	50	1	49	6,520,208	67,919	0.015	25,944,413	270,254	100.00	182					
10	SRV-QUERY1	2	144	75	73	1	25	6,501,930	45,152	0.022	25,846,679	179,491	100.00	182					
11	SRV-QUERY1	2	192	98	96	1	2	6,795,993	35,396	0.028	26,987,811	140,562	100.00	182					

Server System Performance



Workload SRV-QUERY25 – More complex query, highest throughput, lowest response time

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	CPU				Queries			Log reads			BuCache			Elapsed
					busy	user	sys	idle	total	per cpu	Response time	total	per cpu	read	time			
					[%]	[%]	[%]	[%]	[qps]	[qps]	[ms]	[dbps]	[dbps]	[%]	[s]			
2	12	SRV-QUERY25	1	1	2	1	0	98	25,985	25,985	0.038	728,475	728,475	99.96	182			
	13	SRV-QUERY25	1	24	26	25	0	74	443,080	18,462	0.054	12,392,509	516,355	100.00	182			
	14	SRV-QUERY25	1	48	51	50	0	49	776,193	16,171	0.062	21,643,524	450,907	100.00	182			
	15	SRV-QUERY25	1	72	75	74	1	25	889,468	12,354	0.080	24,759,956	343,888	100.00	182			
	16	SRV-QUERY25	1	96	98	97	1	2	989,822	10,311	0.096	27,505,028	286,511	100.00	182			

Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	CPU				Queries			Log reads			BuCache			Elapsed
					busy	user	sys	idle	total	per cpu	Response time	total	per cpu	read	time			
					[%]	[%]	[%]	[%]	[qps]	[qps]	[ms]	[dbps]	[dbps]	[%]	[s]			
9	12	SRV-QUERY25	2	2	2	1	0	98	53,726	26,863	0.037	1,506,933	753,467	99.96	180			
	13	SRV-QUERY25	2	48	25	25	0	75	902,585	18,804	0.053	25,235,088	525,731	100.00	182			
	14	SRV-QUERY25	2	96	51	50	0	49	1,577,747	16,435	0.061	43,988,376	458,212	100.00	182			
	15	SRV-QUERY25	2	144	75	73	1	25	1,802,631	12,518	0.079	50,170,859	348,409	100.00	182			
	16	SRV-QUERY25	2	192	97	96	1	3	2,000,281	10,418	0.096	55,576,848	289,463	100.00	182			

Server System Performance



Workload SRV-REPORT – Online Report, max throughput of Logical Reads

Reference System
Single Instance

Run	Test	Workload	Nodes	CPU				Queries	Queries	Response	Log reads	Log reads	BuCache	Elapsed
				busy	user	sys	idle							
[qps]	[qps]	[ms]	[dbps]	[qps]	[ms]	[s]	[dbps]	[qps]	[ms]	[s]	[dbps]	[dbps]	[%]	[s]
2	2	SRV-REPORT	1	1	2	1	0	6,670	6,670	0.150	852,999	852,999	100.00	181
3	SRV-REPORT	1	24	26	25	0	74	109,872	4,578	0.217	14,013,303	583,888	100.00	182
4	SRV-REPORT	1	48	51	50	0	49	193,727	4,036	0.246	24,627,202	513,067	100.00	182
5	SRV-REPORT	1	72	76	74	1	24	229,886	3,193	0.312	29,152,184	404,891	100.00	182
6	SRV-REPORT	1	96	99	98	1	1	258,873	2,697	0.369	32,756,754	341,216	100.00	182

Reference System
2-node Cluster

Run	Test	Workload	Nodes	CPU				Queries	Queries	Response	Log reads	Log reads	BuCache	Elapsed
				busy	user	sys	idle							
[qps]	[qps]	[ms]	[dbps]	[qps]	[ms]	[s]	[dbps]	[qps]	[ms]	[s]	[dbps]	[dbps]	[%]	[s]
9	2	SRV-REPORT	2	2	2	1	0	13,884	6,942	0.144	1,775,598	887,799	100.00	180
3	SRV-REPORT	2	48	25	25	0	75	221,925	4,623	0.215	28,290,092	589,377	100.00	182
4	SRV-REPORT	2	96	50	49	0	50	391,932	4,083	0.244	49,811,699	518,872	100.00	182
5	SRV-REPORT	2	144	76	74	1	24	461,731	3,206	0.310	58,545,252	406,564	100.00	182
6	SRV-REPORT	2	192	99	97	1	1	525,654	2,738	0.363	66,502,195	346,366	100.00	182

Server System Performance



Workload SRV-SCAN – Scan-Rate in Oracle Buffer Cache

Reference System
Single Instance

Run	Test	Workload	Nodes	CPU				Scan rate total [MBps]	Scan rate per cpu [Mbps]	Log reads total [dbps]	Log reads per cpu [dbps]	BuCache read [%]	Elapsed time [s]	
				busy	user	sys	idle							
2	17	SRV-SCAN	1	1	2	1	0	98	2,658	2,658	340,660	340,660	99.99	181
	18	SRV-SCAN	1	24	26	25	0	74	53,452	2,227	6,840,661	285,028	100.00	183
	19	SRV-SCAN	1	48	51	50	0	49	93,348	1,945	11,918,097	248,294	100.00	183
	20	SRV-SCAN	1	72	75	74	0	25	112,195	1,558	14,164,011	196,722	100.00	183
	21	SRV-SCAN	1	96	98	97	0	2	127,023	1,323	16,081,687	167,518	100.00	183

Reference System
2-node Cluster

Run	Test	Workload	Nodes	CPU				Scan rate total [MBps]	Scan rate per cpu [Mbps]	Log reads total [dbps]	Log reads per cpu [dbps]	BuCache read [%]	Elapsed time [s]	
				busy	user	sys	idle							
9	17	SRV-SCAN	2	2	2	1	0	98	5,543	2,772	710,561	355,281	99.99	182
	18	SRV-SCAN	2	48	25	25	0	75	108,285	2,256	13,855,451	288,655	100.00	183
	19	SRV-SCAN	2	96	51	50	0	49	187,009	1,948	23,871,434	248,661	100.00	183
	20	SRV-SCAN	2	144	75	74	1	25	227,210	1,578	28,705,443	199,343	100.00	183
	21	SRV-SCAN	2	192	98	97	1	2	258,579	1,347	32,710,285	170,366	100.00	183

Server System Performance



Workload SRV-MIXED – Mixed queries and full table scans

Reference System
Single Instance

Run	Test	Workload	Nodes	CPU				Queries			Log reads			BuCache	Elapsed
				busy	user	sys	idle	total	per cpu	Response time	total	per cpu	read		
[qps]	[qps]	[ms]	[dbps]	[dbps]	[%]	[s]							[%]	[s]	
3	2	SRV-MIXED	1	4	5	4	0	95	141,813	35,453	0.028	2,159,436	539,859	100.00	182
3	SRV-MIXED	1	24	26	25	0	74	662,709	27,613	0.036	10,399,503	433,313	100.00	182	
4	SRV-MIXED	1	48	51	50	0	49	1,113,074	23,189	0.043	17,843,103	371,731	100.00	182	
5	SRV-MIXED	1	72	75	74	1	25	1,221,603	16,967	0.059	20,503,328	284,768	100.00	182	
6	SRV-MIXED	1	96	98	97	1	2	1,383,477	14,411	0.069	23,460,145	244,377	100.00	182	


Reference System
2-node Cluster

Run	Test	Workload	Nodes	CPU				Queries			Log reads			BuCache	Elapsed
				busy	user	sys	idle	total	per cpu	Response time	total	per cpu	read		
[qps]	[qps]	[ms]	[dbps]	[dbps]	[%]	[s]							[%]	[s]	
10	2	SRV-MIXED	2	8	5	4	0	95	272,844	34,106	0.029	4,290,051	536,256	100.00	182
3	SRV-MIXED	2	48	25	25	0	75	1,331,390	27,737	0.036	21,115,772	439,912	100.00	183	
4	SRV-MIXED	2	96	51	50	0	49	2,238,224	23,315	0.042	36,500,369	380,212	100.00	183	
5	SRV-MIXED	2	144	75	74	1	25	2,442,773	16,964	0.058	42,067,495	292,135	100.00	182	
6	SRV-MIXED	2	192	98	97	1	2	2,736,163	14,251	0.070	47,252,138	246,105	100.00	182	



Swiss precision in performance measurement.

Workloads to determine the Storage Performance in Database Operations





Motivation

Storage performance significantly impacts the performance of all database operations and, in some cases, storage license and maintenance costs.

The goal is to

- Validate the performance capabilities of the storage system in database operations
- Validate the impact of storage technologies like deduplication, compression, encryption, replication, off-loading, tiering, etc., on database performance and storage space utilization
- Optimize storage system license and maintenance costs

Note

Some cloud service providers do not publish their storage components and configurations. Components and configurations of cloud services are subject to change without notice.



Key Performance Metrics

- **SQL sequential read throughput** in megabytes per second [MBps]
- **SQL random read throughput** in I/O operations per second [IOPS]
- **SQL I/O service time** in milliseconds [ms]
- **SQL random write throughput** in database blocks per second [dbps]

Storage System Workloads




Description

Workload	Measurement Unit	Action
STO-READ	[MBps]	<p>SQL statements performing a sequential table scan using conventional storage devices.</p> <p>This workload delivers maximum sequential throughput using conventional storage.</p>
STO-OFFLOAD	[MBps]	<p>SQL statements performing a sequential table scan using smart-scan offload technology.</p> <p>This workload delivers maximum sequential throughput using smart-scan technology on Oracle Engineered Systems.</p>
STO-RANDOM	[IOPS] [ms]	<p>SQL statements reading/updating blocks via index access for different read/write ratios. The workload parameter specifies the write ratio in %. The following values are supported {0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100}.</p> <p>This workload delivers maximum random I/O operations per database server and/or storage system.</p>
STO-SCATTER	[dbps]	<p>SQL statement performing scattered block writes bypassing the buffer cache.</p> <p>The workload STO-SCATTER writes the blocks by foreground processes; in contrast, the DBWR-THR workload writes the blocks by background processes.</p>

Notes

- In general, all STO workloads are I/O-bound. However, the STO-RANDOM workload also requires corresponding CPU power.
- These kinds of storage workloads are generic to all applications in all industries.

Storage System Performance



Storage System Performance



Workload STO-READ – Sequential Read using a conventional Storage System

Reference System
Single Instance

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	F1Cache	BuCache	Elapsed	
			[%]	Nodes	Jobs	DOP	busy	user	sys	idle	iow	[IOPS]	total	read	total	[MBps]	F1Cache	read	[%]
4	1	STO-READ	0	1	1	4	2	1	1	98	0	3,636	0.912	3,619	3,619	100.00	0.00	0.00	173
	2	STO-READ	0	1	4	4	2	1	1	98	0	3,821	4.046	3,802	3,802	100.00	0.00	0.00	197
	3	STO-READ	0	1	8	4	3	2	1	97	0	6,222	4.938	6,204	6,204	100.00	0.00	0.00	181
	4	STO-READ	0	1	12	4	3	2	1	97	0	6,116	7.422	6,103	6,103	100.00	0.00	0.00	225
	5	STO-READ	0	1	16	4	3	2	1	97	0	6,282	9.992	6,269	6,269	100.00	0.00	0.00	219
	6	STO-READ	0	1	20	4	3	2	1	97	0	6,173	12.442	6,160	6,160	100.00	0.00	0.00	208

Reference System
2-node Cluster

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	F1Cache	BuCache	Elapsed	
			[%]	Nodes	Jobs	DOP	busy	user	sys	idle	iow	[IOPS]	total	read	total	[MBps]	F1Cache	read	[%]
11	1	STO-READ	0	2	2	4	2	1	1	98	0	6,628	1.015	6,531	6,531	100.00	0.00	0.00	175
	2	STO-READ	0	2	8	4	2	1	1	98	0	11,147	2.724	11,078	11,078	100.00	0.00	0.00	175
	3	STO-READ	0	2	16	4	3	2	1	97	0	11,682	5.297	11,631	11,631	100.00	0.00	0.00	183
	4	STO-READ	0	2	24	4	3	2	1	97	0	12,024	7.740	11,981	11,981	100.00	0.00	0.00	188
	5	STO-READ	0	2	32	4	3	2	1	97	0	12,118	10.107	12,067	12,067	100.00	0.00	0.00	193
	6	STO-READ	0	2	40	4	3	2	1	97	0	12,174	12.646	12,132	12,132	100.00	0.00	0.00	204

Storage System Performance



Workload STO-OFFLOAD – Sequential Read using offload technology

Reference System
Single Instance

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	F1Cache	BuCache	Elapsed	
			[%]	Nodes	Jobs	DOP	busy	user	sys	idle	iow	[IOPS]	total	read	total	[MBps]	F1Cache	read	[%]
4	33	STO-OFFLOAD	0	1	1	1	1	1	0	99	0	23,611	0.456	23,526	23,526	100.00	0.00	0.00	171
	34	STO-OFFLOAD	0	1	4	1	1	1	1	99	0	52,103	0.519	51,923	51,923	100.00	0.00	0.00	172
	35	STO-OFFLOAD	0	1	8	1	2	1	1	98	0	65,782	0.627	65,556	65,556	100.00	0.00	0.00	174
	36	STO-OFFLOAD	0	1	12	1	2	1	1	98	0	68,821	0.916	68,586	68,586	100.00	0.00	0.00	174
	37	STO-OFFLOAD	0	1	16	1	2	1	1	98	0	70,700	1.198	70,458	70,458	100.00	0.00	0.00	175
	38	STO-OFFLOAD	0	1	20	1	2	1	1	98	0	70,076	1.531	69,835	69,835	100.00	0.00	0.00	177

Reference System
2-node Cluster

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	F1Cache	BuCache	Elapsed	
			[%]	Nodes	Jobs	DOP	busy	user	sys	idle	iow	[IOPS]	total	read	total	[MBps]	F1Cache	read	[%]
11	33	STO-OFFLOAD	0	2	2	1	2	1	1	98	0	45,224	0.478	44,931	44,931	100.00	0.00	0.00	171
	34	STO-OFFLOAD	0	2	8	1	1	1	1	99	0	64,711	0.668	64,303	64,303	100.00	0.00	0.00	172
	35	STO-OFFLOAD	0	2	16	1	2	1	1	98	0	69,557	1.185	69,122	69,122	100.00	0.00	0.00	173
	36	STO-OFFLOAD	0	2	24	1	2	1	1	98	0	72,848	1.749	72,394	72,394	100.00	0.00	0.00	174
	37	STO-OFFLOAD	0	2	32	1	1	1	1	99	0	72,396	2.372	71,943	71,943	100.00	0.00	0.00	175

Note

The X8 data sheet specifies 75 GBps scan rate for QRHC.

Storage System Performance



Workload STO-RANDOM – Random I/O, 100% read

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	F1Cache	BuCache	Elapsed
			busy	user	sys	idle	iow		total	read	total	read	total	F1Cache	read	read	time	
			[%]	Nodes	Jobs	DOP	[%]	[%]	[%]	[%]	[IOPS]	[ms]	[MBps]	[MBps]	[%]	[%]	[s]	
4	65	STO-RANDOM	0	1	1	1	2	1	1	98	0	39,917	0.206	312	312	100.00	1.68	181
	67	STO-RANDOM	0	1	8	1	11	6	3	89	0	270,179	0.230	2,111	2,111	100.00	1.16	183
	69	STO-RANDOM	0	1	16	1	21	12	6	79	0	478,121	0.285	3,735	3,735	100.00	1.36	182
	71	STO-RANDOM	0	1	24	1	30	17	8	70	0	612,490	0.400	4,785	4,785	100.00	1.54	182
	73	STO-RANDOM	0	1	32	1	35	20	10	65	0	675,594	0.627	5,278	5,278	100.00	1.61	182
	75	STO-RANDOM	0	1	40	1	39	22	11	61	0	707,590	0.936	5,528	5,528	100.00	1.81	182
	79	STO-RANDOM	0	1	56	1	42	24	12	58	0	719,556	1.657	5,622	5,622	100.00	2.01	182

Note

The peak IOPS throughput means a high service time. Today (2024), random I/O service time (8 kbyte block size) for database systems should be below 500 microseconds.

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	F1Cache	BuCache	Elapsed
			busy	user	sys	idle	iow		total	read	total	read	total	F1Cache	read	read	time	
			[%]	Nodes	Jobs	DOP	[%]	[%]	[%]	[%]	[IOPS]	[ms]	[MBps]	[MBps]	[%]	[%]	[s]	
11	65	STO-RANDOM	0	2	2	1	2	1	1	98	0	67,955	0.214	544	544	100.00	-0.33	183
	67	STO-RANDOM	0	2	16	1	13	7	4	87	0	476,058	0.259	3,743	3,743	100.00	1.65	182
	69	STO-RANDOM	0	2	32	1	21	12	6	79	0	745,340	0.334	5,855	5,855	100.00	1.88	182
	71	STO-RANDOM	0	2	48	1	24	11	8	76	0	1,168,859	0.581	9,179	9,179	100.00	1.71	183
	73	STO-RANDOM	0	2	64	1	26	12	9	74	0	1,287,733	0.857	10,122	10,122	100.00	2.11	182
	79	STO-RANDOM	0	2	112	1	32	15	11	68	0	1,399,140	2.008	11,001	11,001	100.00	2.85	182
	81	STO-RANDOM	0	2	128	1	32	15	11	68	0	1,410,819	2.489	11,094	11,094	100.00	3.00	182
	87	STO-RANDOM	0	2	176	1	35	17	12	65	0	1,425,543	3.955	11,212	11,212	100.00	3.10	182

Note

The X8 data sheet specifies 1,194,000 read IOPS for QRHC.

Storage System Performance



Workload STO-RANDOM – Random I/O, 80% read

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	BuCache	F1Cache	Elapsed
			busy	user	sys	idle	iow		total	read	total			F1Cache	read	read	[%]	[s]
			[%]	Nodes	Jobs	DOP	[%]	[%]	[%]	[%]	[%]	[IOPS]	[ms]					
4	97	STO-RANDOM	20	1	1	1	2	1	1	98	0	35,488	0.211	278	278	100.00	15.90	182
99	STO-RANDOM	20	1	8	1	11	6	3	89	0	224,047	0.289	1,750	1,750	100.00	15.24	182	
101	STO-RANDOM	20	1	16	1	19	11	5	81	0	364,894	0.457	2,851	2,851	100.00	15.43	183	
103	STO-RANDOM	20	1	24	1	24	14	7	76	0	443,129	0.706	3,462	3,462	100.00	16.03	183	
105	STO-RANDOM	20	1	32	1	27	16	7	73	0	479,279	1.060	3,744	3,744	100.00	16.72	183	
107	STO-RANDOM	20	1	40	1	30	17	8	70	0	503,026	1.475	3,930	3,930	100.00	17.07	183	
111	STO-RANDOM	20	1	56	1	32	19	9	68	0	518,558	2.411	4,051	4,051	100.00	17.62	183	

Note

The peak IOPS throughput means a high service time. Today (2024), random I/O service time (8 kbyte block size) for database systems should be below 500 microseconds.

Run	Test	Workload	Wri				CPU	CPU	CPU	CPU	CPU	Phys reads	IO time	Phys reads	Phys reads	F1Cache	BuCache	Elapsed
			busy	user	sys	idle	iow		total	read	total			F1Cache	read	read	[%]	[s]
			[%]	Nodes	Jobs	DOP	[%]	[%]	[%]	[%]	[%]	[IOPS]	[ms]					
21	1	STO-RANDOM	20	2	2	1	2	1	1	98	0	66,545	0.227	524	524	100.00	17.99	182
3	STO-RANDOM	20	2	16	1	10	5	3	90	0	423,127	0.336	3,319	3,319	100.00	15.93	183	
5	STO-RANDOM	20	2	32	1	17	9	5	83	0	662,583	0.534	5,208	5,208	100.00	16.78	183	
7	STO-RANDOM	20	2	48	1	21	11	6	79	0	781,877	0.817	6,153	6,153	100.00	17.56	183	
9	STO-RANDOM	20	2	64	1	24	13	7	76	0	845,871	1.105	6,651	6,651	100.00	18.18	184	
11	STO-RANDOM	20	2	80	1	26	14	7	74	0	883,718	1.471	6,951	6,951	100.00	18.69	184	
13	STO-RANDOM	20	2	96	1	27	15	8	73	0	904,607	1.862	7,116	7,116	100.00	18.91	183	
14	STO-RANDOM	20	2	102	1	27	15	8	73	0	909,024	1.998	7,151	7,151	100.00	18.93	183	

Storage System Performance



Workload STO-SCATTER – Random Write foreground processes

Reference System
Single Instance

Run	Test	Workload	Wri		CPU	CPU	CPU	CPU	CPU	Phys writes	Phys writes	Phys writes	Phys writes	F1Cache	Elapsed	
			[%]	Nodes	busy	user	sys	idle	iow		total	[dbps]	[IOPS]	[MBps]	write [%]	time [s]
4	129	STO-SCATTER	100	1	1	2	1	1	98	0	45,039	11,253	353	353	100.00	180
	130	STO-SCATTER	100	1	4	6	2	2	94	0	151,756	37,897	1,188	1,188	100.00	182
	131	STO-SCATTER	100	1	8	11	5	4	89	0	200,457	50,079	1,570	1,570	100.00	181
	132	STO-SCATTER	100	1	12	15	7	5	85	0	235,887	58,943	1,847	1,418	76.78	182
	133	STO-SCATTER	100	1	16	18	10	6	82	0	220,527	55,146	1,727	1,254	72.61	182

Reference System
2-node Cluster

Run	Test	Workload	Wri		CPU	CPU	CPU	CPU	CPU	Phys writes	Phys writes	Phys writes	Phys writes	F1Cache	Elapsed	
			[%]	Nodes	busy	user	sys	idle	iow		total	[dbps]	[IOPS]	[MBps]	write [%]	time [s]
11	129	STO-SCATTER	100	2	2	2	1	1	98	0	89,822	22,449	703	703	100.00	180
	130	STO-SCATTER	100	2	8	6	2	2	94	0	261,262	65,283	2,181	2,046	93.79	182
	131	STO-SCATTER	100	2	16	8	3	3	92	0	282,461	70,633	2,212	2,212	100.00	181
	132	STO-SCATTER	100	2	24	10	5	4	90	0	347,930	87,010	2,725	2,725	100.00	182
	133	STO-SCATTER	100	2	32	11	5	4	89	0	356,007	89,081	2,788	2,788	100.00	182
	134	STO-SCATTER	100	2	40	12	6	4	88	0	359,573	90,020	2,816	2,816	100.00	182

Notes

- The X8 data sheet specifies 1,088,000 write IOPS for QRHC
- The actual write rate to the storage system is 3x higher due to ASM's high-redundancy ($3 \times 359,573 = 1,078,719$).



Swiss precision in performance measurement.

Workloads to determine the Log Writer Performance





Motivation

Log Writer processes are primarily responsible for transaction management and database consistency in case of failures.

These processes are critical to overall Oracle performance, especially with a high transaction load.

The goal is to

- Optimize throughput and latency of REDO log writers
- Validate the impact of Oracle Data Guard on local transaction performance
- Validate the impact of several other factors on log writer performance, such as data deduplication, data compression, usage of ASM redundancy level, etc.



Key Performance Metrics

- **SQL commit throughput** in transactions per second [tps]
- **SQL commit latency** in milliseconds [ms]
- **Log writer throughput** in megabyte per second [MBps]

Log Writer Workloads



Description

Workload	Measurement Unit	Action
LGWR-LAT1	[tps]	Small-sized transaction; workload uses COMMIT WRITE WAIT IMMEDIATE.
	[ms]	This workload shows the maximum commit rate and the minimum commit latency for <u>small-sized</u> transactions generating around <u>1 kB</u> yte redo data per transaction.
LGWR-LAT25	[tps]	Medium-sized transaction; workload uses COMMIT WRITE WAIT IMMEDIATE.
	[ms]	This workload shows the maximum commit rate and the minimum commit latency for <u>medium-sized</u> transactions generating around <u>25 kB</u> yte redo data per transaction.
LGWR-LAT125	[tps]	Large-sized transaction size; workload uses COMMIT WRITE WAIT IMMEDIATE.
	[ms]	This workload shows the maximum commit rate and the minimum commit latency for <u>larger-sized</u> transactions generating around <u>125 kB</u> yte redo data per transaction. This transaction size is typical for payment systems in banking applications.
LGWR-THR	[MBps]	Huge transaction; workload uses COMMIT WRITE NOWAIT BATCH. This workload shows the maximum redo data written by log writer processes.

Notes

- These kinds of transactions are generic to all applications in all industries.
- The actual REDO data volume per transaction can vary depending on the database size and the usage of RAC technology. Therefore, the exact value of this metric is explicitly shown in the peakmarks reports.

Log Writer Performance



Log Writer Performance



Workload LGWR-LAT1 – Small transactions, max commit throughput, low commit latency

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	CPU #prc LGWR	Commit thrput [tps]	Commit latency [ms]	LogFile sync [ms]	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO data [kBpt]	FlCache write [%]	Elapsed time [s]
5	1	LGWR-LAT1	1	1	1	1	0	99	0	9	4,074	0.245	0.175	12,761	4,121	6	1.383	99.91	180
5	5	LGWR-LAT1	1	16	5	4	1	95	0	9	31,745	0.501	0.399	104,918	4,200	43	1.397	100.00	182
9	9	LGWR-LAT1	1	32	8	6	1	92	0	9	46,056	0.695	0.549	153,440	3,114	63	1.400	100.00	181
13	13	LGWR-LAT1	1	48	9	8	1	91	0	9	60,490	0.786	0.630	194,777	2,750	82	1.392	100.00	183
17	17	LGWR-LAT1	1	64	13	10	2	87	0	9	73,004	0.872	0.698	229,257	2,492	99	1.390	100.00	183
21	21	LGWR-LAT1	1	80	15	13	2	85	0	9	82,733	0.963	0.768	254,905	2,271	112	1.386	100.00	182
25	25	LGWR-LAT1	1	96	18	15	2	82	0	9	92,293	1.034	0.834	280,277	2,096	125	1.383	100.00	182

Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	CPU #prc LGWR	Commit thrput [tps]	Commit latency [ms]	LogFile sync [ms]	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO data [kBpt]	FlCache write [%]	Elapsed time [s]
12	1	LGWR-LAT1	2	2	2	1	1	98	0	18	6,165	0.323	0.234	19,487	6,258	8	1.396	99.98	182
3	3	LGWR-LAT1	2	32	6	4	1	94	0	18	55,534	0.572	0.461	197,131	10,794	77	1.417	100.00	183
5	5	LGWR-LAT1	2	64	8	6	2	92	0	18	88,145	0.722	0.584	300,785	9,020	121	1.404	100.00	182
7	7	LGWR-LAT1	2	96	11	9	2	89	0	18	110,529	0.863	0.695	364,364	7,960	151	1.401	100.00	183
9	9	LGWR-LAT1	2	128	14	11	2	86	0	18	131,324	0.969	0.781	421,304	7,288	179	1.395	100.00	182
11	11	LGWR-LAT1	2	160	16	13	2	84	0	18	153,826	1.031	0.833	478,342	5,434	209	1.388	87.62	183
13	13	LGWR-LAT1	2	192	18	14	2	82	0	18	172,065	1.104	0.882	526,155	3,995	234	1.390	100.00	184
15	15	LGWR-LAT1	2	224	20	16	3	80	0	18	183,894	1.187	0.937	558,979	3,749	250	1.393	90.58	186
17	17	LGWR-LAT1	2	256	23	19	3	77	0	18	195,328	1.276	1.002	590,846	3,570	266	1.394	77.85	186
19	19	LGWR-LAT1	2	288	25	21	3	75	0	18	203,230	1.356	1.073	610,915	3,350	276	1.392	100.00	189
21	21	LGWR-LAT1	2	320	27	22	3	73	0	18	209,735	1.443	1.152	627,172	3,097	285	1.391	100.00	192

Log Writer Performance



Workload LGWR-LAT25 – Medium-sized transactions, max commit throughput, low commit latency

Reference System
Single Instance

Run	Test	Workload	Nodes	CPU busy	CPU user	CPU sys	CPU idle	CPU iow	CPU #prc	LGWR	Commit thrput [tps]	Commit latency [ms]	LogFile sync [ms]	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO data [kBpt]	FlCache write [%]	Elapsed time [s]
5	33	LGWR-LAT25	1	1	2	1	1	98	0	9	1,491	0.671	0.279	86,824	1,547	41	27.941	100.00	182
	35	LGWR-LAT25	1	8	6	4	1	95	0	9	7,923	1.005	0.594	434,862	2,540	203	26.220	100.00	182
	37	LGWR-LAT25	1	16	8	6	1	92	0	9	11,221	1.419	0.946	576,299	1,637	269	24.577	100.00	182
	39	LGWR-LAT25	1	24	9	7	1	91	0	9	12,320	1.943	1.398	621,435	1,222	291	24.155	85.26	181
	41	LGWR-LAT25	1	32	10	8	1	91	0	9	13,077	2.439	1.841	647,394	1,032	303	23.728	100.00	182
	43	LGWR-LAT25	1	40	10	8	1	90	0	9	13,792	2.896	2.236	662,045	899	310	23.028	100.00	182

Reference System
2-node Cluster

Run	Test	Workload	Nodes	CPU busy	CPU user	CPU sys	CPU idle	CPU iow	CPU #prc	LGWR	Commit thrput [tps]	Commit latency [ms]	LogFile sync [ms]	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO data [kBpt]	FlCache write [%]	Elapsed time [s]
12	33	LGWR-LAT25	2	2	2	1	1	98	0	18	2,513	0.795	0.346	140,985	2,623	66	26.904	100.00	181
	34	LGWR-LAT25	2	16	6	4	1	94	0	18	14,430	1.103	0.627	783,458	4,669	366	25.962	100.00	182
	35	LGWR-LAT25	2	32	9	6	1	91	0	18	21,224	1.500	0.937	1,085,797	5,023	505	24.388	94.45	182
	36	LGWR-LAT25	2	48	11	8	2	89	0	18	25,362	1.885	1.223	1,287,709	5,078	599	24.165	91.30	182
	37	LGWR-LAT25	2	64	12	9	2	88	0	18	27,291	2.333	1.527	1,379,385	4,247	642	24.094	99.99	182
	38	LGWR-LAT25	2	80	13	10	2	87	0	18	29,219	2.722	1.803	1,419,974	3,741	662	23.191	92.39	182
	...																		
	46	LGWR-LAT25	2	208	20	16	3	80	0	18	34,348	5.951	3.197	1,628,515	2,367	763	22.745	96.69	185
	47	LGWR-LAT25	2	224	21	17	3	79	0	18	35,495	6.161	3.139	1,678,448	2,383	787	22.690	93.76	186
	48	LGWR-LAT25	2	240	21	17	3	79	0	18	36,241	6.499	3.236	1,716,774	2,393	805	22.736	96.83	184
	49	LGWR-LAT25	2	256	22	18	3	78	0	18	37,078	6.664	3.184	1,767,036	2,477	828	22.876	100.00	188

Log Writer Performance



Workload LGWR-LAT125 – Large transactions, max commit throughput, low commit latency

Reference System
Single Instance

Run	Test	Workload	Nodes	CPU busy	CPU user	CPU sys	CPU idle	CPU iow	CPU #prc	Commit thrput	Commit latency	LogFile sync	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO kBpt	FileCache write [%]	Elapsed time [s]	
5	65	LGWR-LAT125	1	1	2	1	0	98	0	9	442	2.264	0.594	128,767	510	61	140.747	100.00	182
	67	LGWR-LAT125	1	8	7	6	1	93	0	9	2,380	3.352	1.432	628,442	1,137	295	127.115	91.17	182
	69	LGWR-LAT125	1	16	10	8	1	90	0	9	2,967	5.374	2.745	735,389	710	346	119.384	93.43	182
	71	LGWR-LAT125	1	24	12	10	1	88	0	9	3,621	6.597	3.426	858,429	552	404	114.318	100.00	182
	73	LGWR-LAT125	1	32	14	11	2	86	0	9	3,992	7.980	4.515	932,410	500	439	112.703	90.00	182
	75	LGWR-LAT125	1	40	14	11	2	86	0	9	4,189	9.502	5.100	977,609	386	461	112.679	90.47	182
	77	LGWR-LAT125	1	48	15	12	2	85	0	9	4,377	10.917	5.578	1,013,383	337	478	111.823	86.62	182
	79	LGWR-LAT125	1	56	16	13	2	84	0	9	4,593	12.146	6.302	1,032,064	328	487	108.542	100.00	182

Reference System
2-node Cluster

Run	Test	Workload	Nodes	CPU busy	CPU user	CPU sys	CPU idle	CPU iow	CPU #prc	Commit thrput	Commit latency	LogFile sync	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO kBpt	FileCache write [%]	Elapsed time [s]	
12	65	LGWR-LAT125	2	2	2	1	1	98	0	18	764	2.608	0.667	216,567	888	102	136.954	100.00	181
	66	LGWR-LAT125	2	16	9	7	1	91	0	18	4,910	3.242	1.072	1,319,552	4,452	619	129.016	100.00	182
	67	LGWR-LAT125	2	32	12	9	2	88	0	18	6,440	4.953	2.096	1,625,758	3,213	762	121.222	96.26	182
	68	LGWR-LAT125	2	48	15	12	2	85	0	18	7,629	6.254	2.632	1,824,650	2,691	857	114.963	100.00	182
	69	LGWR-LAT125	2	64	18	14	2	82	0	18	8,784	7.254	3.061	2,062,175	2,442	969	112.942	99.99	182
	70	LGWR-LAT125	2	80	20	16	2	80	0	18	9,458	8.405	3.706	2,211,406	2,082	1,040	112.590	92.25	182
	71	LGWR-LAT125	2	96	21	17	3	79	0	18	10,053	9.483	4.083	2,349,924	1,898	1,106	112.626	100.00	182
	72	LGWR-LAT125	2	112	22	18	3	78	0	18	10,368	10.727	4.423	2,406,002	1,815	1,132	111.847	92.74	182
	..																		
	77	LGWR-LAT125	2	192	24	19	3	76	0	18	11,583	16.378	5.499	2,594,696	1,520	1,222	108.050	100.00	183

Log Writer Performance



Workload LGWR-THR – Maximum log writer throughput

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	CPU #prc LGWR	Commit thrput [tps]	Commit latency [ms]	LogFile sync [ms]	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO data [kBpt]	FileCache write [%]	Elapsed time [s]
5	97	LGWR-THR	1	1	2	2	0	98	0	9	321	3.110	0.577	191,519	115	91	288.742	71.45	180
	98	LGWR-THR	1	4	7	5	1	93	0	9	1,133	3.523	2.800	646,194	420	305	275.788	100.00	181
	99	LGWR-THR	1	8	10	8	1	90	0	9	1,804	4.416	4.313	988,157	487	466	264.721	100.00	182
	100	LGWR-THR	1	12	17	13	2	83	0	9	2,263	5.274	8.242	1,200,251	352	567	256.588	100.00	182
	101	LGWR-THR	1	16	17	13	2	83	0	9	2,571	6.197	11.501	1,328,855	461	628	249.973	100.00	182


Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	CPU #prc LGWR	Commit thrput [tps]	Commit latency [ms]	LogFile sync [ms]	REDO data [rbps]	REDO data [IOPS]	REDO data [MBps]	REDO data [kBpt]	FileCache write [%]	Elapsed time [s]
12	97	LGWR-THR	2	2	2	1	1	98	0	18	488	4.092	1.348	270,752	468	128	268.396	100.00	181
	98	LGWR-THR	2	16	9	7	1	91	0	18	3,026	5.261	1.693	1,614,870	2,279	760	257.316	100.00	181
	99	LGWR-THR	2	32	14	11	2	86	0	18	4,501	7.090	3.784	2,302,606	1,883	1,085	246.868	100.00	181
	100	LGWR-THR	2	48	16	13	2	84	0	18	4,986	9.615	6.496	2,437,707	1,578	1,150	236.091	100.00	181
	101	LGWR-THR	2	64	18	14	2	82	0	18	5,154	12.388	8.322	2,491,403	1,446	1,175	233.485	100.00	182
	102	LGWR-THR	2	80	18	14	3	82	0	18	5,281	15.100	10.556	2,497,715	1,366	1,178	228.475	100.00	181
	103	LGWR-THR	2	96	19	15	3	81	0	18	5,502	17.362	12.947	2,556,880	1,401	1,206	224.497	95.20	182
	104	LGWR-THR	2	112	20	16	3	80	0	18	5,558	20.076	14.167	2,576,229	1,313	1,215	223.921	100.00	181



Swiss precision in performance measurement.

Workloads to determine the Database Writer Performance





Motivation

Database writer performance for buffer management is critical to overall database performance, especially for transaction systems with a high rate of updates and applications that primarily load data via the buffer cache.

The goal is to

- Optimize the number of database writer processes
- Validate the impact of several factors on database writer performance, e.g., ASM redundancy level, storage system compression technology, etc.



Key Performance Metrics

- **Database writer throughput** in database blocks per second [dbps]



Description

Workload	Measurement Unit	Action
DBWR-THR	[dbps]	Massive block changes in the buffer cache; workload uses COMMIT WRITE NOWAIT BATCH.
	[MBps]	This workload shows the maximum number of changed blocks written back to the storage system by database writer processes. The number of database writer processes is a configurable Oracle instance parameter. The workload DBWR-THR writes the blocks by background processes; in contrast, the STO-SCATTER workload writes the blocks by foreground processes.

Database Writer Performance



Database Writer Performance



Workload DBWR-THR – Maximum database writer throughput

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	CPU #prc DBWR	Phys writes total [dbps]	Phys writes total [IOPS]	Phys writes total [MBps]	REDO data [MBps]	Phys writes FlCache [MBps]	FlCache write [%]	Elapsed time [s]
6	312	DBWR-THR	1	1	3	2	0	97	0	12	9,582	2,290	84	9	76	90.72	181
	313	DBWR-THR	1	4	9	7	1	91	0	12	40,428	13,938	349	32	323	92.56	182
	314	DBWR-THR	1	8	17	14	2	83	0	12	86,579	30,474	735	57	703	95.56	183
	315	DBWR-THR	1	12	23	20	2	77	0	12	126,578	42,584	1,075	83	1,029	95.69	182
	316	DBWR-THR	1	16	31	26	3	69	0	12	155,222	67,526	1,322	105	1,251	94.62	183

Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	CPU #prc DBWR	Phys writes total [dbps]	Phys writes total [IOPS]	Phys writes total [MBps]	REDO data [MBps]	Phys writes FlCache [MBps]	FlCache write [%]	Elapsed time [s]
13	1	DBWR-THR	2	2	4	2	1	96	0	24	39,488	27,076	373	62	373	100.00	181
	2	DBWR-THR	2	8	9	6	2	91	0	24	197,333	34,425	1,778	227	1,778	100.00	182
	3	DBWR-THR	2	16	16	11	3	84	0	24	300,089	83,328	2,928	366	2,643	90.27	182
	4	DBWR-THR	2	24	23	16	5	77	0	24	328,586	182,857	3,047	462	2,735	89.77	183
	5	DBWR-THR	2	32	25	16	6	75	0	24	304,372	241,604	2,858	462	2,702	94.54	182


Note

- This configuration used the default configuration of 12 database writer processes per instance.
- The actual write rate to the storage system is 3x higher due to ASM's high redundancy.



Swiss precision in performance measurement.

Workloads to determine the
Data Load Performance





Motivation

Data load performance capabilities are essential for all kinds of database applications:

- transaction processing systems
- data warehouse systems and data analytics systems

The amount of data is increasing, and the time window for loading the data decreases.

The goal is to

- Optimize data load throughput
- Validate the impact of several factors on data load performance



Key Performance Metrics

- **SQL data load rate** in megabytes per second [MBps] or in rows per second [rps]



Description

Workload	Measurement Unit	Action
DL-BUFFER	[MBps] [rps]	<p>Insert of program generated data via default buffer cache into Oracle tables, includes maintenance of 1 unique and 2 non-unique indexes, uses COMMIT WRITE WAIT IMMEDIATE. The workload parameter specifies the number of rows per INSERT; the following values are supported {1, 2, 3, 4, 5, 10, 20, 25, 50, 100}.</p> <p>This data load workload is mainly used in Transaction Processing systems.</p>
DL-DIRECT	[MBps] [TBph]	<p>Insert data copying from other tables (CTAS technology) bypassing the buffer cache, includes maintenance of 1 unique index, uses COMMIT WRITE NOWAIT BATCH and NOLOGGING.</p> <p>This data load workload is mainly used in Data Warehouse systems.</p>
DL-STREAM	[MBps] [rps]	<p>Insert data using a memory-optimized buffer pool, including maintenance of 1 unique index, using PL/SQL procedure to flush the buffer pool for memory-optimized tables. The workload parameter specifies the number of rows per INSERT; the following values are supported {1, 2, 3, 4, 5, 10, 20, 25, 50, 100}.</p> <p>This data load workload is mainly used in Data Analytics and Internet-of-things (IOT) systems.</p> <p>This workload is only available if the memory-optimized row store for fast ingest is configured.</p>

Notes

- These data load workloads are generic to all applications in all industries.
- The data load throughput depends mainly on the method (buffered, direct, streamed) and the transaction size (number of rows between commits), which is configurable.
- The technology used for workload DL-STREAM (memory-optimized tables) is generally available in Oracle Enterprise Edition starting with 19.12.

Data Load Performance



Data Load Performance



Workload DL-BUFFER – Data load via buffer cache

Reference System
Single Instance

Run	Test	Workload	TX size	CPU busy	CPU user	CPU sys	CPU idle	CPU iow	Load rate total	Load rate total	Phys writes total	Phys writes total	REDO data	FlCache write	Elapsed time		
			[rpt]	Nodes	Jobs	[%]	[%]	[%]	[%]	[rps]	[MBps]	[IOPS]	[MBps]	[MBps]	[%]	[s]	
7	1	DL-BUFFER	5	1	1	2	1	0	98	0	13,243	4	2,971	24	13	99.99	182
	5	DL-BUFFER	5	1	16	7	5	1	93	0	113,484	32	8,516	232	106	100.00	182
	9	DL-BUFFER	5	1	32	10	8	2	90	0	162,879	47	14,351	347	147	100.00	181
	13	DL-BUFFER	5	1	48	13	11	2	87	0	192,029	55	12,846	443	177	100.00	182
	17	DL-BUFFER	5	1	64	17	13	2	83	0	213,652	61	14,987	528	198	100.00	182
	21	DL-BUFFER	5	1	80	18	14	2	82	0	233,276	67	17,176	603	214	100.00	182
	25	DL-BUFFER	5	1	96	19	16	3	81	0	241,635	69	19,886	674	223	100.00	182

Reference System
2-node Cluster

Run	Test	Workload	TX size	CPU busy	CPU user	CPU sys	CPU idle	CPU iow	Load rate total	Load rate total	Phys writes total	Phys writes total	REDO data	FlCache write	Elapsed time		
			[rpt]	Nodes	Jobs	[%]	[%]	[%]	[%]	[rps]	[MBps]	[IOPS]	[MBps]	[MBps]	[%]	[s]	
14	1	DL-BUFFER	5	2	2	2	1	1	98	0	25,151	7	5,796	46	24	100.00	182
	3	DL-BUFFER	5	2	32	7	5	1	93	0	204,245	58	14,866	398	193	100.00	183
	5	DL-BUFFER	5	2	64	11	8	2	89	0	303,210	87	18,297	617	275	100.00	182
	7	DL-BUFFER	5	2	96	13	10	2	87	0	377,273	108	19,309	828	347	100.00	182
	9	DL-BUFFER	5	2	128	17	13	2	83	0	420,796	120	23,709	988	392	100.00	182
	11	DL-BUFFER	5	2	160	20	16	3	80	0	452,938	130	28,397	1,123	416	100.00	182
	13	DL-BUFFER	5	2	192	23	18	3	77	0	476,194	136	32,492	1,248	439	100.00	184

Data Load Performance



Workload DL-DIRECT – Data load bypassing the buffer cache

Run	Test	Workload	TX size [rpt]	CPU							Load rate total [rps]	Load rate total [MBps]	Phys writes		REDO		
				Nodes	Jobs	busy [%]	user [%]	sys [%]	idle [%]	iow [%]			total	[IOPS]	[MBps]	data [%]	write [%]
7	33	DL-DIRECT	125,000	1	1	2	1	0	98	0	514,291	147	1,048	225	34	99.99	182
	34	DL-DIRECT	125,000	1	4	5	4	1	95	0	1,892,914	542	3,521	827	124	100.00	181
	35	DL-DIRECT	125,000	1	8	8	7	1	92	0	3,054,551	874	7,001	1,338	200	100.00	181
	36	DL-DIRECT	125,000	1	12	9	8	1	91	0	3,438,067	984	8,908	1,512	225	100.00	182
	37	DL-DIRECT	125,000	1	16	10	8	1	90	0	3,507,254	1,003	12,293	1,756	230	88.43	181
	38	DL-DIRECT	125,000	1	20	11	9	1	89	0	3,690,651	1,056	16,658	1,707	242	95.47	182
	39	DL-DIRECT	125,000	1	24	13	10	2	87	0	3,824,905	1,094	17,680	1,708	251	94.93	182

Run	Test	Workload	TX size [rpt]	CPU							Load rate total [rps]	Load rate total [MBps]	Phys writes		REDO		
				Nodes	Jobs	busy [%]	user [%]	sys [%]	idle [%]	iow [%]			total	[IOPS]	[MBps]	data [%]	write [%]
10	376	DL-DIRECT	125,000	2	2	2	2	1	98	0	637,699	182	1,406	285	41	85.68	181
	377	DL-DIRECT	125,000	2	8	7	6	1	93	0	2,107,202	603	4,954	959	137	89.02	182
	378	DL-DIRECT	125,000	2	16	12	10	1	88	0	3,658,710	1,047	9,843	1,720	239	88.58	183
	379	DL-DIRECT	125,000	2	24	17	15	2	83	0	4,797,117	1,372	14,372	2,306	314	88.81	183
	380	DL-DIRECT	125,000	2	32	22	19	2	78	0	5,865,405	1,678	18,022	2,730	384	89.15	182
	381	DL-DIRECT	125,000	2	40	25	21	2	75	0	6,843,925	1,958	22,572	3,222	448	88.64	183
	382	DL-DIRECT	125,000	2	48	27	23	3	73	0	7,366,348	2,108	24,804	3,472	482	87.92	183
	383	DL-DIRECT	125,000	2	56	29	25	3	71	0	7,820,652	2,238	28,584	3,728	512	87.81	183
	384	DL-DIRECT	125,000	2	64	30	26	3	70	0	8,020,544	2,295	30,415	3,849	526	87.49	183

Note

The X8 data sheet specifies a peak load rate of 7.5 GBph = 2,133 MBps for QRHC.



Swiss precision in performance measurement.

Workloads to determine the Data Analytics Performance





Motivation

In general, data analytics operations cause full table scans. The performance of full table scan operation depends on the location of data in the storage hierarchy (storage, memory) and the technology used to boost scan performance (smart scan for the data location storage system, in-memory column store for the data location memory).

The goal is to

- Optimize data scan throughput
- Validate the impact of several factors on data analytics performance
 - » Smart scan offload technology
 - » In-memory column store technology
- Optimize Oracle license and maintenance costs



Key Performance Metrics

- **SQL data scan rate** in megabytes per second [MBps] or rows per second [rps]



Description

Workload	Measurement Unit	Action
DA-STORAGE	[MBps] [rps]	Simple aggregate after full table scan, using conventional storage .
DA-OFFLOAD	[MBps] [rps]	Simple aggregate after full table scan, using smart-scan offload technology .
DA-ROWSTORE	[MBps] [rps]	Simple aggregate after full table scan, using row-store .
DA-COLSTORE	[MBps] [rps]	Simple aggregate after full table scan, using column-store . This workload uses in-memory optimized arithmetic operations introduced in 18c if supported by the underlying processor. Starting in Oracle 19.8, the base level of the in-memory option supports up to 16 GByte in-memory column store without license costs.

Note

These kinds of analytic workloads are generic to all applications in all industries.

Data Analytics Performance



Data Analytics Performance



Workload DA-STORAGE – Data scan using a conventional storage technology

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	DOP	CPU	CPU	CPU	CPU	CPU	Scan rate	Scan rate	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow	total	total	read	read	time
						[%]	[%]	[%]	[%]	[%]	[rps]	[MBps]	[%]	[%]	[s]
8	1	DA-STORAGE	1	1	4	2	1	0	98	0	9,539,317	3,245	100.00	0.00	171
3	DA-STORAGE	1	8	4	3	2	1	97	0	18,418,358	6,265	100.00	0.00	172	
5	DA-STORAGE	1	16	4	4	2	1	96	0	18,483,254	6,287	100.00	0.00	173	
7	DA-STORAGE	1	24	4	4	2	1	96	0	18,492,392	6,290	100.00	0.00	173	
9	DA-STORAGE	1	32	4	4	2	1	96	0	18,495,409	6,291	100.00	0.00	174	

Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	DOP	CPU	CPU	CPU	CPU	CPU	Scan rate	Scan rate	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow	total	total	read	read	time
						[%]	[%]	[%]	[%]	[%]	[rps]	[MBps]	[%]	[%]	[s]
15	1	DA-STORAGE	2	2	4	2	1	1	98	0	16,450,340	5,601	100.00	0.00	171
3	DA-STORAGE	2	16	4	3	2	1	97	0	34,464,955	11,734	100.00	0.00	172	
5	DA-STORAGE	2	32	4	4	2	1	96	0	35,703,125	12,155	100.00	0.00	172	
7	DA-STORAGE	2	48	4	4	2	1	96	0	36,270,748	12,348	100.00	0.00	172	
9	DA-STORAGE	2	64	4	4	3	1	96	0	36,527,567	12,436	100.00	0.00	173	
11	DA-STORAGE	2	80	4	4	3	1	96	0	36,640,231	12,474	100.00	0.00	174	
13	DA-STORAGE	2	96	4	4	3	1	96	0	36,765,045	12,516	100.00	0.00	174	

Data Analytics Performance



Workload DA-OFFLOAD – Data scan using a offload storage technology

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	DOP	CPU	CPU	CPU	CPU	CPU	Scan rate	Scan rate	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow	total	total	read	read	time
						[%]	[%]	[%]	[%]	[%]	[rps]	[MBps]	[%]	[%]	[s]
8	33	DA-OFFLOAD	1	1	1	1	0	0	99	0	51,028,896	17,363	100.00	0.00	171
	35	DA-OFFLOAD	1	8	1	1	1	0	99	0	113,256,101	38,535	100.00	0.00	171
	37	DA-OFFLOAD	1	16	1	2	1	1	98	0	126,550,960	43,059	100.00	0.00	171
	39	DA-OFFLOAD	1	24	1	2	1	1	98	0	156,881,791	53,379	100.00	0.00	172
	41	DA-OFFLOAD	1	32	1	2	1	1	98	0	166,308,748	56,587	100.00	0.00	172
	43	DA-OFFLOAD	1	40	1	3	1	1	98	0	169,935,247	57,820	100.00	0.00	172

Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	DOP	CPU	CPU	CPU	CPU	CPU	Scan rate	Scan rate	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow	total	total	read	read	time
						[%]	[%]	[%]	[%]	[%]	[rps]	[MBps]	[%]	[%]	[s]
15	33	DA-OFFLOAD	2	2	1	1	1	0	99	0	58,173,231	19,819	100.00	0.00	171
	35	DA-OFFLOAD	2	16	1	2	1	1	98	0	164,581,594	56,070	100.00	0.00	171
	37	DA-OFFLOAD	2	32	1	2	1	1	98	0	187,076,316	63,733	100.00	0.00	171
	39	DA-OFFLOAD	2	48	1	2	1	1	98	0	195,758,609	66,691	100.00	0.00	171
	41	DA-OFFLOAD	2	64	1	2	1	1	98	0	196,795,769	67,044	100.00	0.00	172
	43	DA-OFFLOAD	2	80	1	2	1	1	98	0	199,305,704	67,899	100.00	0.00	172
	45	DA-OFFLOAD	2	96	1	2	1	1	98	0	201,142,122	68,525	100.00	0.00	172

Data Analytics Performance



Workload DA-ROWSTORE – Data scan using buffer cache row store

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	DOP	CPU	CPU	CPU	CPU	CPU	Scan rate	Scan rate	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow	total	total	read	read	time
						[%]	[%]	[%]	[%]	[%]	[rps]	[MBps]	[%]	[%]	[s]
8	65	DA-ROWSTORE	1	1	1	2	1	0	98	0	7,548,718	2,281	0.00	99.73	180
	66	DA-ROWSTORE	1	24	1	26	25	0	74	0	180,623,599	54,565	0.00	100.00	182
	67	DA-ROWSTORE	1	48	1	51	50	0	49	0	308,723,162	93,263	0.00	100.00	183
	68	DA-ROWSTORE	1	72	1	75	74	0	25	0	376,972,319	113,881	0.00	100.00	183
	69	DA-ROWSTORE	1	96	1	97	96	0	3	0	417,263,505	126,052	0.00	100.00	182

Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	DOP	CPU	CPU	CPU	CPU	CPU	Scan rate	Scan rate	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow	total	total	read	read	time
						[%]	[%]	[%]	[%]	[%]	[rps]	[MBps]	[%]	[%]	[s]
15	65	DA-ROWSTORE	2	2	1	2	1	0	98	0	15,223,603	4,600	0.00	99.74	181
	66	DA-ROWSTORE	2	48	1	25	25	0	75	0	362,635,020	109,529	0.00	100.00	183
	67	DA-ROWSTORE	2	96	1	50	49	0	50	0	617,217,180	186,421	0.00	100.00	183
	68	DA-ROWSTORE	2	144	1	75	73	1	25	0	754,465,316	227,875	0.00	100.00	183
	69	DA-ROWSTORE	2	192	1	96	94	1	4	0	845,157,690	255,266	0.00	100.00	183

Data Analytics Performance



Workload DA-COLSTORE – Data scan using column store

Reference System
Single Instance

Run	Test	Workload	Nodes	Jobs	DOP	CPU					Scan rate total [rps]	Scan rate total [MBps]	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow			read	[%]	time
8	70	DA-COLSTORE	1	1	1	2	1	0	98	0	4,820,827,589	1,460,407	0.00	70.46	181
71	DA-COLSTORE	1	24	1	26	25	0	74	0	65,379,202,103	19,816,074	0.00	100.00	181	
72	DA-COLSTORE	1	48	1	52	50	1	48	0	58,633,796,758	17,787,953	0.00	100.00	181	
73	DA-COLSTORE	1	72	1	76	74	1	24	0	60,924,913,364	18,495,364	0.00	100.00	181	
74	DA-COLSTORE	1	96	1	97	95	1	3	0	62,339,614,528	18,936,557	0.00	100.00	181	

Reference System
2-node Cluster

Run	Test	Workload	Nodes	Jobs	DOP	CPU					Scan rate total [rps]	Scan rate total [MBps]	F1Cache	BuCache	Elapsed
						busy	user	sys	idle	iow			read	[%]	time
15	70	DA-COLSTORE	2	2	1	2	1	0	98	0	10,861,614,976	3,287,494	0.00	99.99	182
71	DA-COLSTORE	2	48	1	26	25	0	74	0	141,771,840,591	42,916,756	0.00	100.00	182	
72	DA-COLSTORE	2	96	1	52	50	1	48	0	116,215,766,166	35,198,349	0.00	100.00	181	
73	DA-COLSTORE	2	144	1	75	72	1	25	0	125,054,889,772	37,885,745	0.00	100.00	181	
74	DA-COLSTORE	2	192	1	96	93	1	4	0	131,717,969,993	39,916,054	0.00	100.00	182	


Note

The scan rate in MBps corresponds to the amount of data in the scanned table. This value depends on the data model. In our data model, the row length is approx. 300 bytes.



Swiss precision in performance measurement.

Workloads to determine the Transaction Processing Performance





Motivation

For capacity planning reasons, it is necessary to know the performance characteristics of a platform for transactions of varying complexity. Transaction Processing is the most complex database operation.

The goal is to

- Optimize the transaction throughput and transaction response time
- Validate the impact of several factors on transaction throughput and response time:
 - » ratio of database size and buffer cache size
 - » transaction size
 - » I/O random read service time
 - » log writer latency
- Identify the limiting resource



Key Performance Metrics

- **SQL transaction throughput** in transactions per second [tps]
- **SQL transaction response time** in milliseconds [ms]

Transaction Processing Workloads



Description

Workload	Measurement Unit	Action
TP-REPORT	[tps]	Online report of transaction processing application.
	[ms]	SELECT Ø 25 rows via index.
TP-LOOKUP	[tps]	Fast lookup query.
	[ms]	SELECT single row via index, e.g., SELECT an account, product. If configured, this workload uses tables in the memory-optimized row store introduced in 18c for fast look-up. Otherwise, it uses conventional tables.

Notes:

- These transaction processing workloads are generic to all applications in all industries.
- The technology used for workload TP-LOOKUP (memory-optimized tables) is generally available in Oracle Enterprise Edition starting with 19.12.

Transaction Processing Workloads



Description

Workload	Measurement Unit	Action
TP-LIGHT	[tps]	Light transaction type.
	[ms]	SELECT/UPDATE single row via index, e.g., SELECT/UPDATE an account, product, or order with different SELECT/UPDATE ratios using SELECT FOR UPDATE locking. The workload parameter specifies the update ratio in %; the following values are supported {0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100}. This workload shows maximum transaction throughput and minimum transaction response time.
TP-MEDIUM	[tps]	Medium transaction type.
	[ms]	SELECT/UPDATE Ø 25 rows via index, e.g., SELECT/UPDATE last month's bank account bookings with different SELECT/UPDATE ratios using SELECT FOR UPDATE locking. The workload parameter specifies the update ratio in %; the following values are supported {0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100}.
TP-HEAVY	[tps]	Heavy transaction type.
	[ms]	SELECT/UPDATE Ø 125 rows via index, e.g., SELECT/UPDATE last month's cell phone call records with different SELECT/UPDATE ratios using SELECT FOR UPDATE locking. The workload parameter specifies the update ratio in %; the following values are supported {0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100}.

Note

These transaction processing workloads are generic to all applications in all industries.

Transaction Processing Workloads




Description

Workload	Measurement Unit	Action
TP-MIXED1	[tps]	A read-intensive mix of different transaction types.
	[ms]	Logical reads: 83% read, 17% write; avg 256-byte REDO per transaction.
		This workload is a complex workload that is composed of the equally weighted simple workloads TP-REPORT and TP-LOOKUP, TP-MEDIUM (with 40% UPDATE) and DL-BUFFER (with 2 rpt).
TP-MIXED2	[tps]	A write-intensive mix of different transaction types.
	[ms]	Logical reads: 65% read, 35% write; avg 1,725-byte REDO per transaction.
		This workload is a complex workload that is composed of the equally weighted simple workloads TP-LIGHT (with 40% UPDATE), TP-MEDIUM (with 30% UPDATE), TP-HEAVY (with 20% UPDATE), and DL-BUFFER (with 3 rpt).
TP-CUSTOM	[tps]	A configurable and customized mix of different transaction types.
	[ms]	Default configuration compatible to peakmarks Version 9 TP-MIXED.

Notes

- TP-MIXED1 and TP-MIXED2 are the most representative peakmarks® workloads for determining Oracle transaction processing performance capabilities on a specific platform.
- TP-MIXED1 achieves much higher transaction rates and CPU utilization than TP-MIXED2.
- These kinds of transaction processing workloads are generic to all industry applications.
- Peakmarks provides several performance reports for TP workloads: kpm_tp.sql (used in this presentation) shows overall transaction performance, kpm_tpplus.sql provides more detailed information, and kpm_tpio.sql provides logical and physical I/O information.

Transaction Processing Performance



Transaction Processing Performance



Workload TP-REPORT – online report, avg 25 rows per query

Reference System
Single Instance

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed	
			[%]	busy	user	sys	idle	iow	total	[tps]	[ms]	read	data	sync	read	read	[s]
9	2	TP-REPORT	N/A	1	1	1	1	0	748	1.337	0.207	1.802	1.279	18.68	100.00	181	
10	TP-REPORT	N/A	1	32	24	13	7	76	0	18,797	1.698	0.262	0.581	1.192	22.71	100.00	182
14	TP-REPORT	N/A	1	48	34	19	10	66	0	24,563	1.944	0.296	1.022	1.179	23.53	100.00	183
18	TP-REPORT	N/A	1	64	43	25	12	57	0	28,264	2.249	0.343	0.739	1.167	24.32	100.00	182
22	TP-REPORT	N/A	1	80	49	29	13	51	0	30,795	2.584	0.400	0.573	1.157	25.01	100.00	182
26	TP-REPORT	N/A	1	96	54	32	14	46	0	31,923	2.990	0.474	0.701	1.159	24.92	100.00	183

Reference System
2-node Cluster

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed	
			[%]	busy	user	sys	idle	iow	total	[tps]	[ms]	read	data	sync	read	read	[s]
16	2	TP-REPORT	N/A	2	2	1	1	98	0	1,293	1.541	0.218	1.279	1.113	29.46	100.00	181
6	TP-REPORT	N/A	2	32	15	8	5	85	0	17,836	1.784	0.250	0.934	1.030	34.60	100.00	182
10	TP-REPORT	N/A	2	64	25	13	8	75	0	30,408	2.092	0.281	0.778	0.939	39.99	100.00	182
14	TP-REPORT	N/A	2	96	32	17	10	68	0	38,278	2.494	0.314	0.556	0.920	41.09	100.00	182
18	TP-REPORT	N/A	2	128	38	21	11	62	0	44,761	2.840	0.355	0.557	0.925	40.80	100.00	183
22	TP-REPORT	N/A	2	160	43	24	13	57	0	51,247	3.101	0.394	0.498	0.886	43.45	100.00	183

Transaction Processing Performance



Workload TP-LOOKUP – look-up query with minimum response time

Reference System
Single Instance

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed		
			[%]	busy	user	sys	idle	iow	total	[tps]	[ms]	read	data	sync	read	read	[s]	
9	34	TP-LOOKUP	N/A	1	1	1	1	0	99	0	3,357	0.298	0.244	0.841	0.080	74.93	99.99	181
	38	TP-LOOKUP	N/A	1	16	17	17	0	83	0	1,257,350	0.013	0.571	0.396	0.000	100.00	97.75	182
	42	TP-LOOKUP	N/A	1	32	34	33	0	66	0	2,031,891	0.016	0.540	0.355	0.000	100.00	97.86	181
	46	TP-LOOKUP	N/A	1	48	50	49	1	50	0	2,487,948	0.019	0.391	0.307	0.000	100.00	99.05	181
	50	TP-LOOKUP	N/A	1	64	66	65	1	34	0	2,594,656	0.025	0.862	0.329	0.000	100.00	99.10	182
	54	TP-LOOKUP	N/A	1	80	82	81	1	18	0	2,727,060	0.029	0.823	0.324	0.000	100.00	97.90	181
	58	TP-LOOKUP	N/A	1	96	97	95	1	3	0	2,846,073	0.034	3.771	0.336	0.000	100.00	97.84	181

Reference System
2-node Cluster

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed		
			[%]	busy	user	sys	idle	iow	total	[tps]	[ms]	read	data	sync	read	read	[s]	
16	34	TP-LOOKUP	N/A	2	2	1	1	1	99	0	5,452	0.366	0.240	1.155	0.086	73.48	100.00	182
	38	TP-LOOKUP	N/A	2	32	17	17	0	83	0	2,480,910	0.013	0.516	0.380	0.000	100.00	98.67	182
	42	TP-LOOKUP	N/A	2	64	33	33	0	67	0	4,035,779	0.016	0.639	0.412	0.000	100.00	98.22	182
	46	TP-LOOKUP	N/A	2	96	50	49	1	50	0	4,936,726	0.019	0.593	0.345	0.000	100.00	99.10	181
	50	TP-LOOKUP	N/A	2	128	66	65	1	34	0	5,218,022	0.024	0.864	0.431	0.000	100.00	98.26	182
	54	TP-LOOKUP	N/A	2	160	83	81	1	17	0	5,407,780	0.029	0.865	0.359	0.000	100.00	99.10	182
	58	TP-LOOKUP	N/A	2	192	96	94	1	4	0	5,703,844	0.033	1.045	0.376	0.000	100.00	98.34	182

Transaction Processing Performance



Workload TP-LIGHT – maximum transaction throughput and minimum response time (20% update)

Run	Test	Workload	Upd [%]	CPU						Transactions		Response		IO time [ms]	REDO data [kBpt]	LogFile sync [ms]	BuCache read [%]	FlCache read [%]	Elapsed time [s]
				busy	user	sys	idle	iow	total [tps]	time [ms]									
9	66	TP-LIGHT	20	1	1	1	1	0	99	0	1,903	0.525	0.241	0.511	0.313	67.61	100.00	181	
	70	TP-LIGHT	20	1	16	13	8	3	88	0	42,182	0.378	0.235	0.185	0.298	77.82	100.00	182	
	74	TP-LIGHT	20	1	32	25	17	5	75	0	98,024	0.325	0.257	0.184	0.266	83.47	100.00	182	
	78	TP-LIGHT	20	1	48	34	24	7	66	0	138,530	0.345	0.278	0.226	0.261	83.81	100.00	182	
	82	TP-LIGHT	20	1	64	42	29	9	58	0	174,940	0.364	0.294	0.285	0.258	83.88	100.00	182	
	86	TP-LIGHT	20	1	80	51	35	10	49	0	206,960	0.384	0.308	0.281	0.254	83.93	100.00	182	
	90	TP-LIGHT	20	1	96	58	40	12	42	0	236,484	0.404	0.323	0.258	0.247	83.91	100.00	182	
	94	TP-LIGHT	20	1	112	64	45	13	36	0	258,264	0.431	0.350	0.255	0.245	83.92	100.00	182	
	97	TP-LIGHT	20	1	124	68	47	14	32	0	270,624	0.456	0.374	0.306	0.244	83.94	100.00	182	

Run	Test	Workload	Upd [%]	CPU						Transactions		Response		IO time [ms]	REDO data [kBpt]	LogFile sync [ms]	BuCache read [%]	FlCache read [%]	Elapsed time [s]
				busy	user	sys	idle	iow	total [tps]	time [ms]									
16	66	TP-LIGHT	20	2	2	1	1	1	99	0	3,922	0.508	0.243	0.368	0.297	72.21	99.99	182	
	70	TP-LIGHT	20	2	32	15	9	3	85	0	109,183	0.291	0.265	0.188	0.254	86.33	100.00	182	
	74	TP-LIGHT	20	2	64	25	17	6	75	0	204,611	0.311	0.291	0.290	0.248	86.62	100.00	182	
	78	TP-LIGHT	20	2	96	34	23	7	66	0	288,283	0.331	0.322	0.278	0.241	87.17	100.00	182	
	82	TP-LIGHT	20	2	128	41	28	9	59	0	354,492	0.359	0.355	0.350	0.236	87.23	100.00	182	
	86	TP-LIGHT	20	2	160	47	32	10	53	0	404,681	0.393	0.389	0.294	0.234	87.22	100.00	182	
	90	TP-LIGHT	20	2	192	52	35	11	48	0	440,736	0.432	0.432	0.444	0.232	87.22	100.00	183	
	94	TP-LIGHT	20	2	224	56	38	12	44	0	471,001	0.465	0.469	0.415	0.231	87.23	100.00	185	
	97	TP-LIGHT	20	2	248	59	40	13	41	0	490,885	0.490	0.494	0.357	0.230	87.26	100.00	186	

Transaction Processing Performance



Workload TP-MEDIUM – maximum transaction throughput and minimum response time (20% update)

Reference System Single Instance	Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed	
				[%]	busy	user	sys	idle	iow	total	time	read	data	sync	read	read	time	
				Nodes	Jobs	[%]	[%]	[%]	[%]	[tps]	[ms]	[ms]	[kBpt]	[ms]	[%]	[%]	[s]	
9	98	TP-MEDIUM	20	1	1	2	1	1	98	0	701	1.427	0.217	0.415	4.637	46.68	100.00	182
	102	TP-MEDIUM	20	1	16	20	11	6	80	0	7,828	2.036	0.271	0.179	4.949	41.24	100.00	182
	106	TP-MEDIUM	20	1	32	32	18	9	68	0	12,867	2.478	0.335	0.260	4.891	42.44	100.00	182
	110	TP-MEDIUM	20	1	48	42	23	12	58	0	16,438	2.908	0.399	0.260	4.843	42.53	100.00	182
	114	TP-MEDIUM	20	1	64	49	28	14	51	0	19,174	3.324	0.476	0.314	4.774	43.82	100.00	182
	118	TP-MEDIUM	20	1	80	56	32	15	44	0	20,853	3.821	0.564	0.357	4.741	44.83	100.00	181
	122	TP-MEDIUM	20	1	96	60	36	16	40	0	21,953	4.357	0.668	0.325	4.717	45.19	100.00	182
	126	TP-MEDIUM	20	1	112	64	38	17	36	0	22,621	4.935	0.780	0.331	4.709	45.08	100.00	182
	129	TP-MEDIUM	20	1	124	66	40	17	34	0	22,914	5.391	0.872	0.770	4.704	45.06	100.00	182

Reference System 2-node Cluster	Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed	
				[%]	busy	user	sys	idle	iow	total	time	read	data	sync	read	read	time	
				Nodes	Jobs	[%]	[%]	[%]	[%]	[tps]	[ms]	[ms]	[kBpt]	[ms]	[%]	[%]	[s]	
16	98	TP-MEDIUM	20	2	2	2	1	1	98	0	1,328	1.504	0.225	0.398	4.393	59.51	100.00	182
	102	TP-MEDIUM	20	2	32	19	10	6	81	0	13,275	2.399	0.327	0.258	4.799	49.90	100.00	182
	106	TP-MEDIUM	20	2	64	28	15	8	72	0	20,211	3.148	0.465	0.366	4.682	53.37	100.00	182
	110	TP-MEDIUM	20	2	96	34	18	10	66	0	25,088	3.811	0.599	0.390	4.598	55.41	100.00	182
	114	TP-MEDIUM	20	2	128	38	21	11	62	0	28,319	4.499	0.721	0.377	4.566	55.36	100.00	182
	118	TP-MEDIUM	20	2	160	42	23	12	58	0	30,829	5.170	0.841	0.352	4.547	55.05	100.00	182
	122	TP-MEDIUM	20	2	192	44	25	13	56	0	32,644	5.853	0.989	0.416	4.534	55.26	100.00	182
	126	TP-MEDIUM	20	2	224	45	25	13	55	0	33,527	6.550	1.130	0.480	4.526	55.23	100.00	185
	129	TP-MEDIUM	20	2	248	45	26	13	55	0	33,979	7.085	1.243	0.573	4.519	55.37	100.00	186

Transaction Processing Performance



Workload TP-HEAVY – maximum transaction throughput and minimum response time (20% update)

Reference System
Single Instance

Run	Test	Workload	Upd [%]	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	Transactions total [tps]	Response time [ms]	IO time read [ms]	REDO data [kBpt]	LogFile sync [ms]	BuCache read [%]	FlCache read [%]	Elapsed time [s]
9	130	TP-HEAVY	20	1	1	3	1	1	97	0	312	3.207	0.221	0.359	21.771	51.87	100.00	181
	134	TP-HEAVY	20	1	16	25	14	7	75	0	3,013	5.298	0.359	0.384	22.687	44.65	100.00	182
	138	TP-HEAVY	20	1	32	41	23	12	59	0	4,369	7.298	0.584	0.430	22.791	42.40	100.00	182
	142	TP-HEAVY	20	1	48	51	29	14	49	0	4,797	9.975	0.947	0.542	22.886	41.14	100.00	182
	146	TP-HEAVY	20	1	64	56	33	15	44	0	4,908	12.996	1.372	0.379	22.951	40.27	100.00	181

Reference System
2-node Cluster

Run	Test	Workload	Upd [%]	Nodes	Jobs	CPU busy [%]	CPU user [%]	CPU sys [%]	CPU idle [%]	CPU iow [%]	Transactions total [tps]	Response time [ms]	IO time read [ms]	REDO data [kBpt]	LogFile sync [ms]	BuCache read [%]	FlCache read [%]	Elapsed time [s]
16	130	TP-HEAVY	20	2	2	3	1	1	97	0	702	2.848	0.228	0.560	20.356	66.94	100.00	182
	132	TP-HEAVY	20	2	16	14	7	4	86	0	3,675	4.337	0.350	0.331	21.683	57.34	100.00	182
	134	TP-HEAVY	20	2	32	21	11	7	79	0	5,600	5.693	0.547	0.866	21.702	55.56	100.00	181
	136	TP-HEAVY	20	2	48	26	14	8	74	0	6,504	7.350	0.780	0.579	21.763	54.44	100.00	181
	138	TP-HEAVY	20	2	64	29	15	9	71	0	6,863	9.300	1.068	0.730	21.962	52.10	100.00	181
	140	TP-HEAVY	20	2	80	30	16	9	70	0	6,984	11.410	1.390	0.497	22.063	50.89	100.00	181
	142	TP-HEAVY	20	2	96	31	16	9	69	0	7,012	13.635	1.692	0.885	22.085	50.61	100.00	182

Transaction Processing Performance



Workload TP-MIXED1 – Read-intensive mix of different transaction types

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed		
			[%]	busy	user	sys	idle	iow	total	time	read	data	sync	read	read	time		
			Nodes	Jobs	[%]	[%]	[%]	[%]	[tps]	[ms]	[ms]	[kBpt]	[ms]	[%]	[%]	[s]		
10	2	TP-MIXED1	N/A	1	4	4	2	1	96	0	7,864	0.507	0.218	0.239	1.854	65.26	100.00	182
	3	TP-MIXED1	N/A	1	8	7	4	2	93	0	37,713	0.211	0.225	0.246	0.746	77.72	100.00	183
	5	TP-MIXED1	N/A	1	16	16	11	3	84	0	271,708	0.058	0.246	0.350	0.162	92.51	100.00	183
	7	TP-MIXED1	N/A	1	24	27	18	6	73	0	414,529	0.058	0.281	0.466	0.128	93.52	100.00	182
	9	TP-MIXED1	N/A	1	32	33	22	7	67	0	548,974	0.058	0.298	0.582	0.113	93.71	100.00	182
	11	TP-MIXED1	N/A	1	40	38	26	8	62	0	610,997	0.065	0.314	0.692	0.113	93.28	100.00	182

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed		
			[%]	busy	user	sys	idle	iow	total	time	read	data	sync	read	read	time		
			Nodes	Jobs	[%]	[%]	[%]	[%]	[tps]	[ms]	[ms]	[kBpt]	[ms]	[%]	[%]	[s]		
17	2	TP-MIXED1	N/A	2	8	4	2	1	96	0	13,979	0.570	0.240	0.228	2.152	70.11	100.00	181
	5	TP-MIXED1	N/A	2	32	17	11	4	83	0	573,264	0.055	0.292	0.483	0.131	94.14	100.00	182
	9	TP-MIXED1	N/A	2	64	28	19	6	72	0	1,062,532	0.060	0.359	0.800	0.100	94.46	100.00	182
	13	TP-MIXED1	N/A	2	96	37	26	7	63	0	1,512,411	0.063	0.429	1.067	0.083	95.06	100.00	182
	17	TP-MIXED1	N/A	2	128	45	32	8	55	0	1,875,286	0.068	0.496	1.315	0.074	95.35	100.00	182
	21	TP-MIXED1	N/A	2	160	53	39	9	47	0	2,098,252	0.076	0.561	1.559	0.071	95.41	100.00	182
	25	TP-MIXED1	N/A	2	192	60	44	10	40	0	2,233,273	0.085	0.614	1.786	0.071	95.32	100.00	183
	29	TP-MIXED1	N/A	2	224	66	49	11	34	0	2,317,660	0.094	0.668	1.968	0.070	95.25	100.00	186

Transaction Processing Performance



Workload TP-MIXED2 – Write-intensive mix of different transaction types

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed		
			[%]	busy	user	sys	idle	iow	total	[tps]	[ms]	read	data	sync	read	read	[s]	
11	2	TP-MIXED2	N/A	1	4	6	3	2	94	0	5,335	0.744	0.224	0.239	2.722	57.81	100.00	183
	5	TP-MIXED2	N/A	1	16	18	10	5	82	0	15,428	1.030	0.271	0.400	2.793	54.65	100.00	182
	9	TP-MIXED2	N/A	1	32	29	17	8	71	0	23,148	1.376	0.324	0.647	2.822	51.32	100.00	182
	13	TP-MIXED2	N/A	1	48	37	22	10	63	0	29,660	1.610	0.366	0.884	2.761	49.69	100.00	182
	17	TP-MIXED2	N/A	1	64	45	27	12	55	0	32,958	1.931	0.427	1.109	2.841	48.29	100.00	182
	21	TP-MIXED2	N/A	1	80	52	32	13	48	0	35,374	2.249	0.498	1.400	2.881	47.98	100.00	182
	24	TP-MIXED2	N/A	1	92	57	35	14	43	0	36,508	2.506	0.561	1.596	2.901	47.56	100.00	182

Run	Test	Workload	Upd	CPU	CPU	CPU	CPU	CPU	Transactions	Response	IO time	REDO	LogFile	BuCache	FlCache	Elapsed		
			[%]	busy	user	sys	idle	iow	total	[tps]	[ms]	read	data	sync	read	read	[s]	
18	2	TP-MIXED2	N/A	2	8	6	3	2	94	0	10,444	0.762	0.250	0.267	2.827	65.73	100.00	183
	3	TP-MIXED2	N/A	2	16	10	5	3	90	0	17,037	0.933	0.274	0.387	2.917	63.63	100.00	182
	5	TP-MIXED2	N/A	2	32	16	9	4	84	0	26,667	1.192	0.327	0.594	2.932	62.20	100.00	182
	7	TP-MIXED2	N/A	2	48	20	11	6	80	0	32,956	1.450	0.382	0.810	2.895	59.73	100.00	182
	9	TP-MIXED2	N/A	2	64	23	13	7	77	0	37,798	1.685	0.437	1.021	2.880	58.63	100.00	182
	11	TP-MIXED2	N/A	2	80	26	14	7	74	0	41,402	1.922	0.496	1.223	2.942	58.27	100.00	182
	13	TP-MIXED2	N/A	2	96	28	16	8	72	0	45,473	2.098	0.550	1.414	2.908	58.41	100.00	182
	15	TP-MIXED2	N/A	2	112	30	17	8	70	0	49,139	2.266	0.605	1.605	2.865	58.46	100.00	182
	17	TP-MIXED2	N/A	2	128	32	18	9	68	0	51,392	2.478	0.660	1.770	2.854	57.81	100.00	182



Swiss precision in performance measurement.

Workloads to determine the PL/SQL Application Performance





Motivation

Mission-critical systems use PL/SQL to encapsulate essential functions for efficient execution as close to the data as possible. This aspect is critical in cloud environments with separate databases and application servers to reduce traffic between both environments.

The goal is to

- Validate processor performance capabilities to execute PL/SQL code

Note

Separating applications and data may cause performance problems. For example, each roundtrip between the Microsoft Azure data center (application) and the Oracle Cloud Infrastructure data center (data) takes around 2 ms. Starting in 2023, both vendors will provide their infrastructure in a single data center to reduce roundtrip time.



Key Performance Metrics

- **PL/SQL operation throughput** in a million operations per second [Mops]
- **PL/SQL computing time** to process algorithms in seconds [s]



Description

Workload	Measurement Unit	Action
PLS-ADD	[Mops]	<p>Addition of numbers using different numeric data types. The workload parameter specifies the data type; the following values are supported {SI, SF, PI, NU, DA}.</p> <p>This workload shows the impact of the PL/SQL data type on the performance of simple arithmetic operations.</p>
PLS-BUILTIN	[Mops]	<p>Data type-specific operations, including SQL built-in functions, based on core banking and telco billing applications. The workload parameter specifies the data type; the following values are supported {SI, SF, PI, NU, VC}.</p> <p>This workload shows the impact of the PL/SQL data type on the performance of typical operations.</p>

Note

The following abbreviations for PL/SQL data types are used: SI = SIMPLE_INTEGER, SF = SIMPLE_FLOAT, PI = PLS_INTEGER, NU = NUMBER, DA = DATE, VC = VARCHAR2.



Description

Workload	Measurement Unit	Action
PLS-MIXED	[Mops]	<p>Mixed data type-specific operations, including SQL built-in functions.</p> <p>This complex workload is composed of the equally weighted simple workloads PLS-ADD (NUMBER), PLS-ADD (PLS_INTEGER), PLS_BUILTIN (NUMBER), and PLS_BUILTIN (VARCHAR2).</p> <p>PLS-MIXED is the most representative peakmarks® workload to determine an Oracle database server's PL/SQL performance capabilities.</p>
PLS-FIBO	[s]	<p>Calculation of Fibonacci number N. The workload parameter specifies N; the following values are supported {39, 40, 41, 42, 43, 44}.</p> <p>This workload shows the single-thread performance of a simple recursive algorithm implemented in PL/SQL.</p>
PLS-PRIME	[s]	<p>Calculation of first N prime numbers. The workload parameter specifies N; the following values are supported {1000, 10000}.</p> <p>This workload shows the single-thread performance of a simple algorithm implemented in PL/SQL.</p>

PL/SQL Application Program Performance



PL/SQL Application Performance



Workload PLS-MIXED – complex workload with most used PL/SQL operations and data types

Reference System
Single Instance

Run	Test	Workload	Parameter	Nodes	Jobs	CPU	CPU	CPU	CPU	Operations	Operations	Elapsed
						busy	user	sys	idle	total	per cpu	time
						[%]	[%]	[%]	[%]	[Mops]	[Mops]	[s]
14	1	PLS-MIXED	N/A	1	4	5	4	0	95	366.51	91.63	182
	2	PLS-MIXED	N/A	1	24	25	25	0	75	1,997.48	83.23	182
	3	PLS-MIXED	N/A	1	48	50	50	0	50	3,226.36	67.22	182
	4	PLS-MIXED	N/A	1	72	75	74	0	25	3,118.72	43.32	182
	5	PLS-MIXED	N/A	1	96	98	97	0	2	3,298.58	34.36	182

Reference System
2-node Cluster

Run	Test	Workload	Parameter	Nodes	Jobs	CPU	CPU	CPU	CPU	Operations	Operations	Elapsed
						busy	user	sys	idle	total	per cpu	time
						[%]	[%]	[%]	[%]	[Mops]	[Mops]	[s]
20	1	PLS-MIXED	N/A	2	8	5	4	0	95	737.47	92.18	182
	2	PLS-MIXED	N/A	2	48	25	25	0	75	4,004.28	83.42	182
	3	PLS-MIXED	N/A	2	96	50	49	0	50	6,447.20	67.16	182
	4	PLS-MIXED	N/A	2	144	74	73	0	26	6,937.48	48.18	183
	5	PLS-MIXED	N/A	2	192	95	94	0	5	6,572.97	34.23	183



Workload PLS-FIBO and PLS-PRIME – single thread computing time of algorithms

Reference System
Single Instance

Run	Test	Workload	Para meter	CPU			CPU			Operations total [Mops]	Operations per cpu [Mops]	Elapsed time [s]	
				busy Nodes	user [%]	sys [%]	idle [%]	[%]					
13	31	PLS-FIBO		42	1	1	2	1	0	98	0.00	0.00	71
	32	PLS-PRIME		8000	1	1	2	1	0	98	0.00	0.00	80



peakmarks Mission

Identify Key Performance Metrics for Oracle Database Platforms.

On-Premises and in the Cloud.

For Quality Assurance, Evaluations, and Capacity Planning.